



REAL TIME AUTOMATION GATEWAY

460EC-N2E

CONNECT UP TO 32 ETHERNET/IP ADAPTERS

KEY FEATURES

- ▶ Fully configurable EtherNet/IP scanner
- ▶ Map data from up to 32 EtherNet/IP Adapters
- ▶ Effortless browser-based configuration, no programming software is required
- ▶ Simple data translation allows you to manipulate data as it passes between protocols
- ▶ 5-year hardware warranty

Connect Up to 32 EtherNet/IP Adapters

The 460EC can exchange data between up to 32 different EtherNet/IP adapters at one time.

Best of all, the product comes with 5-year warranty.

How Do I Use the 460EC In My Application?

Use data manipulation to modify your data as you transfer it between devices. The manipulation fields allow up to three operations.

It really is that simple.



Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.



ETHERNET/IP SCANNER FEATURES

Operation Mode	Class 1 I/O Scanner
Message Support	Implicit Class 1 Cyclic I/O, Explicit not supported
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double
Maximum EtherNet/IP Adapter Devices	32
Max Data Per Adapter Connection	Up to 496 bytes in each direction
Maximum IO Scan Rate	50 msec

INCLUDED WITH GATEWAY

3' power cable with flying leads	5-year hardware warranty
IPSetup software - automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL/ENVIRONMENTAL


DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2

ENCLOSURE/HARDWARE

Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side

GATEWAY FEATURES & FUNCTIONS

Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

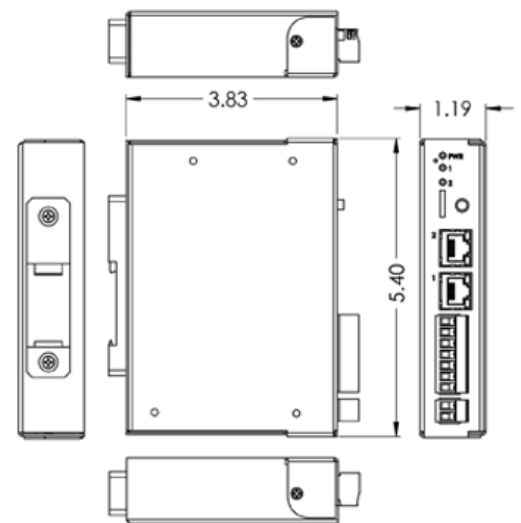

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460EC-N2E	Connect Up to 32 EtherNet/IP Adapters