

Interconnect Up to 32 BACnet/IP Servers

FEATURES

- Fully configurable BACnet/IP client
- BACnet/IP supports device, binary I/O/V, analog I/O/V, multi-state I/O/V, and character string value object types
- Effortless Browser Based Configuration, no programming software is required
- 5-Year Hardware Warranty

Connect Up to 32 BACnet/IP Servers

The 460BC can move data between up to 32 BACnet/IP servers on your network wirelessly using the Wi-Fi IEEE 802.11 b/g/n at 2.4GHz with AES encryption 128-bit.

Best of all, the product comes with 5-year warranty.

How Do I Use the 460BC-N2EW in My Application?

Use data manipulation to modify your data as you transfer it between devices. The manipulation fields allow up to three operations.

It really is that simple..

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.



IP Servers



460BC-N2EW




IP Servers

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

BACNET IP CLIENT FEATURES	
Operation Mode	BACnet/IP Client
Supported Object Types	Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value
Supported Service Codes	Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A
Maximum Connections	32
Number Read/Write Scan Lines per Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 128 Objects

ELECTRICAL / ENVIRONMENTAL	
DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2
ENCLOSURE / HARDWARE	
Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side
INCLUDED WITH GATEWAY	
3' Power Cable with Flying leads	Manual
Complete, Unlimited Access to our Industry Leading Support Staff.	5 Year Hardware Warranty

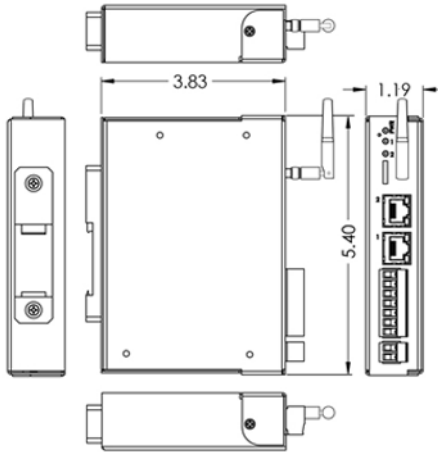

CATALOG #	DESCRIPTION
400BC-N2EW	Connect up to 32 BACnet/IP servers
400BC-N2EW	Connect up to 32 BACnet/IP servers
CAT5 Cross over cable for direct connection to PC for programming	



ALWAYS IN STOCK



READY TO SHIP



ENGINEERD SUPPORT

NOT EXACTLY WHAT YOU WERE LOOKING FOR?

Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612 or check out a listing at www.rtautomation.com/products. We also offer customizations for your applications.



5-YEAR WARRANTY



EMPLOYEE OWNED