

Modbus RTU to DeviceNet Master

FEATURES

- Fully configurable Modbus RTU slave
- Move up to 100 groups of 512 contiguous coils or 512 contiguous registers to or from your Modbus RTU master
- Fully configurable DeviceNet slave device
- Map data up to 240 bytes Of DeviceNet data in up to 15 data group in each direction
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Move Modbus RTU Master Data to a DeviceNet Master

The 460MRSDS connects a Modbus controller to a DeviceNet PLC. All configuration is browser-based meaning there is no programming software required.

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

How Do I Use the 460MRSDS-N34 in My Application?

For most applications, the mapping is very straightforward. Up to 400 bytes of data can be mapped in each direction between protocols. Register and coil data on Modbus it mapped to DeviceNet IO data blocks.

It really is that simple. Need to modify your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to three mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.


When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product’s development, and support doesn’t require a ticket or 24-hour wait.



A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That’s how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

Modbus RTU Slave	
Operation Mode	Modbus RTU Slave
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus RTU Master Connections	1
Contiguous Data Areas	200 Total - 100 reads & 100 writes
Data Area Limits	512 Contiguous Coils or 512 Contiguous Registers
DeviceNet Slave	
Operation Mode	Group 2 DeviceNet Slave
Supported Data Types	Int8, int16, int32, int64, uint8, uint16, uint32, uint64, float, double, binary8, binary16, binary32, Short String
Maximum Connections	1
Maximum Input Size	240 Bytes in up to 15 Data Groups
Maximum Output Size	240 Bytes in up to 15 Data Groups
Maximum IO Scan Rate	50 msec
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

ELECTRICAL / ENVIRONMENTAL	
DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2
ENCLOSURE / HARDWARE	
Size	4.2" x 3.25" x 1"
Weight	7 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side
GATEWAY FEATURES & FUNCTIONS	
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

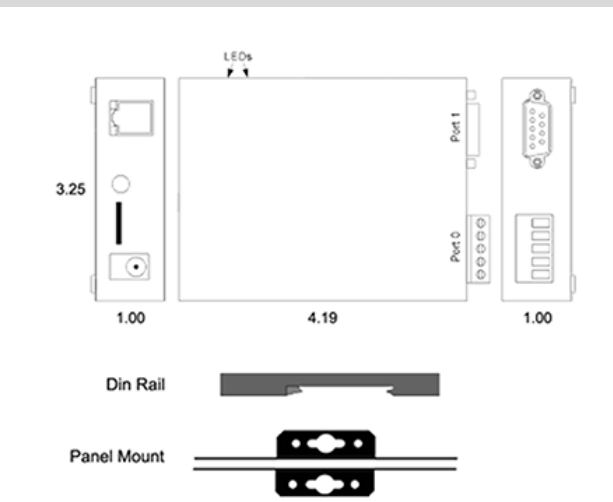

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460MRSDDS-N34	Connects a Modbus RTU master with a DeviceNet master



Made in the
U.S.A. 

Always In
Stock 

Ready to
Ship 

Expert
Support 