

#### **REAL TIME AUTOMATION, INC.** N26W23315 Paul Road, Pewaukee, WI 53072 800.249.1612 | solutions@rtautomation.com

# REAL TIME AUTOMATION GATEWAY SIEMENS S7 PLCS TO SNMP

## 460SCSM-NNA4

# **KEY FEATURES**

- Supports connections to five Siemens S7 PLCs
- Up to 150 read and 150 write requests per connection
- Get data directly from SNMP enabled devices
- Support for SNMPv1 & SNMPv2c
- Effortless browser-based configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-year hardware warranty


## **Connect your Siemens S7 PLCs to SNMP**

The 460SCSM moves data between Siemens S7 PLCs and SNMP Agents. With support for SNMPv1 and SNMPv2C it has never been easier to bring data from all your SNMP enabled network devices to your factory floor. Best of all, the product comes with 5-year warranty.

### How Do I Use the 460SCSM-NNA4 in My Application?

Data from your SNMP Agent device is written directly into data locations in your Siemens S7 PLCs. Receive SNMP trap information with up to 10 variable bindings.

Use a PC based tool to find and display all available Object Identifiers, then export to a file to be imported into the gateway and used for configuration.

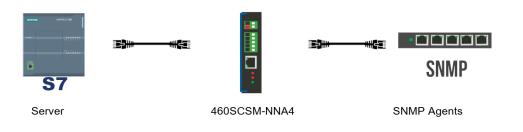

## Why Use RTA As Your Gateway Supplier?

Other companies might offer protocol gateways, but nobody matches the support and service you'll get from RTA. When you call, a real person picks up the phone. Sales gives you straight answers and solid recommendations. And when you need support, you'll talk to an engineer who helped build the product—no tickets, no waiting, just real help, right away.

🌙 800.249.1612



## **REAL TIME AUTOMATION, INC.**

N26W23315 Paul Road, Pewaukee, WI 53072 800.249.1612 | solutions@rtautomation.com

#### Siemens S7 CLIENT FEATURES

S7 300/400/1200/1500
5
150
400
Input (I), Output (Q), and Data Block( DB)
8 Bit Int, 16 Bit Int, 32 Bit Int, 32 Bit Float, Bool and Char Array
SNMP Manager
SNMPv1, SNMPv2c
32
100
Counter32, Gauge32, Integer, IP Address, Octet String, OID, TimeTicks
Gauge32, Integer, Octet String

#### INCLUDED WITH GATEWAY

3' power cable with flying leads	5-year hardware warranty
IPSetup software - automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

#### **ELECTRICAL / ENVIRONMENTAL DC Input Voltage** 12-24 VDC Maximum Baud Pate 115K baud

Maximum Baud Rate	115K baud	
Operating Temperature	-40 C to 85 C	
Certification	RoHS-Compliant, UL, CUL, CE Approvals	
ENCLOSURE / HARDWARE		
Size	3.88" x 2.57" x 1.06"	
Weight	5.5 oz	
Enclosure Type	Anodized Aluminum	
Mounting	Din rail or panel mount	
LEDs	Power LED & 2 general purpose LEDs on side	
GATEWAY FEATURES & FUNCTIONS		
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.	
Gateway Security	You can configure up to 9 different users access to	

gateway.

diagnostic and configuration screens.

also be delivered to a connected device.

specific messages & error messages.


Allows for data manipulation during protocol translation.

Protocol specific status, counters, and error messages are

Allows users to see and log start up sequences, protocol

accessible within the gateway's diagnostics page. They can

Scaling and other data format changes can occur in the

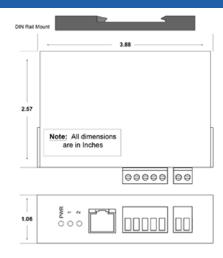

NOT EXACTLY WHAT YOU WERE LOOKING FOR? RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG # DESCRIPTION 460SCSM-NNA4 Connect up to five Siemens S7 PLCs to up to 32 SNMP Agents ENGINERD SUPPORT **BREWED IN WISCONSIN EMPLOYEE OWNED** ALWAYS IN STOCK READY TO SHIP **5-YEAR WARRANTY** 

Contact us:

Gateway Security

Translation Table

Status and Counters

Diagnostic Logging Page

800.249.1612

Solutions@rtautomation.com

