

PROFIBUS to BACnet/IP Server

FEATURES

- Fully Configurable BACnet/IP Client
- BACnet/IP Supports Device, Binary I/O/V, Analog I/O/V, Multi-State I/O/V, and Character String Value Object Types
- Fully Configurable Profibus Slave
- Supports 244 bytes of data in each direction on Profibus DP
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Connect BACnet/IP Servers Device to a PROFIBUS Controller

The 460BCPBS moves data between up to 32 BACnet/IP server devices and a PROFIBUS DP controller. It's the perfect tool to tie in all the BACnet/IP devices in your automation system to PROFIBUS.

Add BACnet/IP server devices into any PROFIBUS controller application.

How do I use the 460BCPBS-N70PB in my application?

BACnet/IP data will be mapped into 10 PROFIBUS DP slots. The slot can consist of up to 244 bytes of data from your BACnet/IP server devices.

When writing from your PROFIBUS controller to your BACnet/IP servers, there will be up to 10 slots each defined by the same types. Data in those slots can be mapped to your BACnet/IP devices.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.


When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

Try the RTA difference today! Call us at 800-249-1612 or check out our solutions at rtautomation.com



A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience, all the better. Thirty years later, our mission remains the same: **to move your data where you need it, when you need it and how you need it.**

BACnet/IP Client FEATURES	
Operation Mode	BACnet/IP Client
Supported Object Types	Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value
Supported Service Codes	Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A
Maximum Connections	32
Number Read/Write Scan Lines per Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 128 Objects
Profibus Slave FEATURES	
Maximum Number of Slots	10 Slots in, 10 Slots out
Slot Data Segment Sizes	2, 4, 8, 16, 24, 32 Bytes
Each Slot Can be Defined for a Single Data Type of	Int8, int16, int32, int64, UInt8, UInt16, UInt32, UInt64, float, double, binary8, binary16 or binary32, Short String
Total Data Supported	244 Bytes in each direction
Maximum Profibus DP Controller Connections	1
Baud Rates Supported	Autobaud (9600, 19.2K, 45.45K, 93.75K, 187.5K,500K, 1.5M, 3M, 6M, 12M bits per second)
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	
ELECTRICAL / ENVIRONMENTAL	
DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals
ENCLOSURE / HARDWARE	
Size	4.4" x 3.87" x 1.15"
Weight	8.5 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side
GATEWAY FEATURES & FUNCTIONS	
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

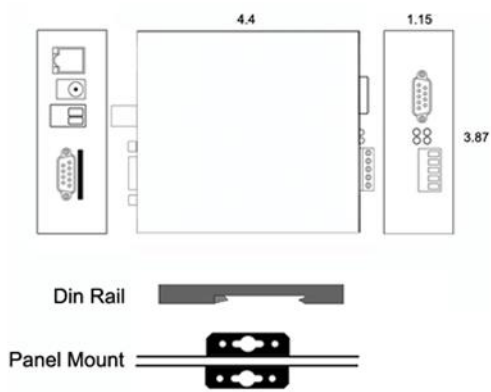

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460BCPBS-N70PB	Connects up to 32 BACnet/IP servers with a PROFIBUS DP controller



Made in the
U.S.A.

Always In
Stock

Ready to
Ship

Expert
Support