

## Wireless BACnet/IP to Siemens S7 PLC

### FEATURES

- Fully configurable BACnet/IP client
- BACnet/IP supports device, binary I/O/V, analog I/O/V, multi-state I/O/V, and character string value object types
- Supports connections to five Siemens S7 PLCs
- Up to 150 read and 150 write requests per connection
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-Year Hardware Warranty

### Connect BACnet/IP Servers to Siemens S7 PLCs over Wi-Fi

The 460BCSC connects a network of up to 32 BACnet/IP server devices with up to five Siemens S7 PLCs using Wi-Fi IEEE 802.11 b/g/n at 2.4GHz with AES encryption 128-bit.

Best of all, the product is made in the USA, always in stock and comes with 5-year warranty.

### How Do I Use the 460BCSC-N2EW in My Application?

You allocate two memory blocks in your Siemens S7 PLC. One area is a user-defined set of output addresses sending data to your BACnet/IP servers. The other is for input only data receiving data from your BACnet/IP servers.

It's really that simple. Need to modify your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to three mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

### Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.



IP Servers



460BCSC-N2EW




Server

**A Solution, A Philosophy, the RTA Way.** We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

| BACNET IP CLIENT FEATURES   |  |
|---|--|
| Operation Mode  | BACnet/IP Client   |
| Supported Object Types  | Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value   |
| Supported Service Codes   | Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A |
| Maximum Connections   | 32   |
| Number Read/Write Scan Lines per Device                             | 200 Total - 100 reads & 100 writes   |
| Scan Line Support   | Up to 128 Objects  |
| Siemens S7 CLIENT FEATURES  |  |
| PLC Support   | S7 300/400/1200/1500   |
| Maximum Number of PLCs Supported                                    | 5  |
| Maximum Number of Inputs/Outputs per PLC                            | 150  |
| Maximum Number of Bytes per Scan Line                               | 400  |
| Memory Area Access  | Input (I), Output (Q), and Data Block( DB)   |
| Supported Data Types  | 8 Bit Int, 16 Bit Int, 32 Bit Int, 32 Bit Float, Bool and Char Array   |
| INCLUDED WITH GATEWAY   |  |
| 3' power cable with flying leads                                    | 5-year hardware warranty   |
| IPSetup software - automatically locates RTA gateway on the network | Unlimited firmware feature upgrades for life   |
| CAT5 crossover cable for direct connection to PC during programming | Complete, unlimited access to our industry leading support staff   |
| Manual  |  |

| ELECTRICAL / ENVIRONMENTAL   |  |
|------------------------------|--|
| DC Input Voltage             | 12-24 VDC  |
| Maximum Baud Rate            | 115K baud  |
| Operating Temperature        | -40 C to 85 C  |
| Certification                | RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2   |
| ENCLOSURE / HARDWARE         |  |
| Size                         | 5.40" x 3.83" x 1.19"  |
| Weight                       | 7.6 oz   |
| Enclosure Type               | Anodized Aluminum  |
| Mounting                     | Din rail or panel mount  |
| LEDs                         | Power LED & 2 general purpose LEDs on side   |
| GATEWAY FEATURES & FUNCTIONS |  |
| Alarming                     | Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.      |
| Gateway Security             | You can configure up to 9 different users access to diagnostic and configuration screens.  |
| Translation Table            | Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.                                      |
| Status and Counters          | Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device. |
| Diagnostic Logging Page      | Allows users to see and log start up sequences, protocol specific messages & error messages.   |

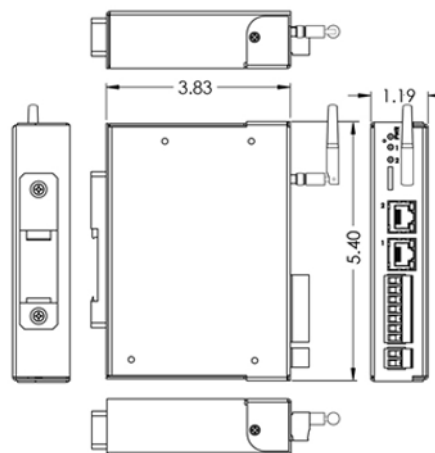

**NOT EXACTLY WHAT YOU WERE LOOKING FOR?**  
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at [www.rtautomation.com/products](http://www.rtautomation.com/products). We also offer customizations for unique applications.


| CATALOG #    | DESCRIPTION  |
|--------------|--|
| 460BCSC-N2EW | Connects up to five Siemens S7 PLCs with as many as 32 BACnet/IP servers over wireless |



ALWAYS IN STOCK



READY TO SHIP



MADE IN THE USA



EXPERT SUPPORT



5-YEAR WARRANTY



EMPLOYEE OWNED