

**Interconnect Up to 32 BACnet MS/TP Slaves**

**FEATURES**

- Fully configurable BACnet MS/TP master
- BACnet MS/TP supports device, binary I/O/V, analog I/O/V, multi-state I/O/V, and character string value object types

**Connect Up to 32 BACnet MS/TP Slaves**

The 460BM can exchange data between up to 32 BACnet MS/TP slaves at one time.

Best of all, the product is made in the USA, always in stock, and comes with a five-year warranty.

**How Do I Use the 460BM-N2EW in My Application?**


Use data manipulation to modify your data as you transfer it between devices. The manipulation fields allow up to three operations.

It really is that simple.

**Why Use Real Time Automation as a Gateway Supplier?**

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.


When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

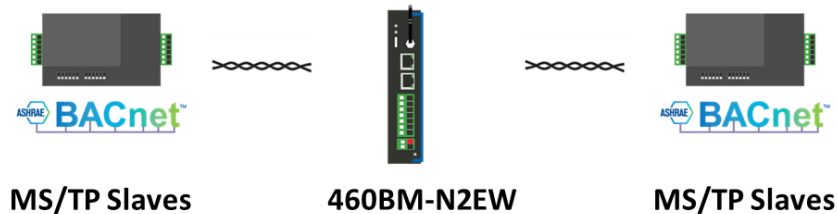

**A Solution, A Philosophy, the RTA Way.** We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

BACnet MS/TP Master	
Operation Mode	BACnet MS/TP Master Initiator
Supported Object Types	Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value
Supported Service Codes	Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A
Maximum Connections	32
Number Read/Write Scan Lines per Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 128 Objects

ELECTRICAL / ENVIRONMENTAL	
DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2
ENCLOSURE / HARDWARE	
Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side
INCLUDED WITH GATEWAY	
3' Power Cable with Flying leads	Manual
Complete, Unlimited Access to our Industry Leading Support Staff.	5 Year Hardware Warranty
IPSetup software – Automatically locates RTA Gateway on the network	Unlimited Firmware Feature Upgrades for Life
CAT5 Cross over cable for direct connection to PC during programming	

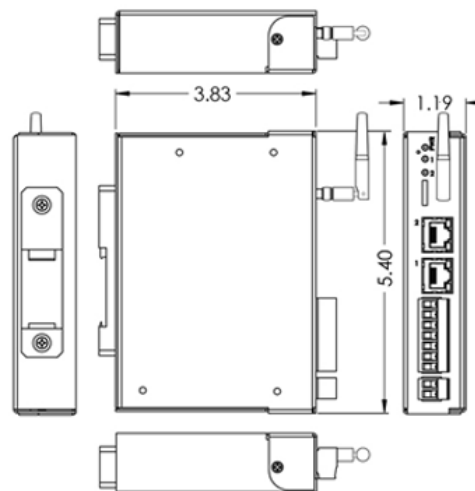

**NOT EXACTLY WHAT YOU WERE LOOKING FOR?**  
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at [www.rtautomation.com/products](http://www.rtautomation.com/products). We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460BM-N2EW	Connect up to 32 BACnet MS/TP slaves



Made in the  
**U.S.A.** 

Always In  
**Stock** 

Ready to  
**Ship** 

Expert  
**Support** 