



REAL TIME AUTOMATION GATEWAY

460BMA-NNA4

# BACNET MS/TP SUBORDINATES TO ASCII

## KEY FEATURES

- ▶ Fully configurable BACnet MS/TP Manager
- ▶ BACnet MS/TP supports device, binary I/O/V, analog I/O/V, multi-state I/O/V, and character string value object types
- ▶ Parse ASCII/HEX data in up to 50 segments by delimiter or offset
- ▶ Concatenate up to 50 data segments into a string
- ▶ Effortless browser-based configuration, no programming software is required
- ▶ Simple data translation allows you to manipulate data as it passes between protocols
- ▶ 5-year hardware warranty

## Deliver Data from Your BACnet MS/TP subordinate Devices to an ASCII-Based System or Controller

The 460BMA moves data between up to 32 BACnet MS/TP devices and serial ASCII.

It's a great tool to implement BACnet MS/TP devices into your PC or embedded applications that support raw ASCII data.

## How Do I Use the 460BMA In My Application?

BACnet analog, binary, and CSV data segments can be converted to ASCII and delivered to your ASCII controller. If you need to command the BACnet/IP servers, an incoming ASCII string can be parsed and directed to user-defined data location.

Need to scale your data or manipulate it with other math functions? The 460BMA allows you to add scaling to any data, apply simple math operations, add alarming, and control the request speeds of your server devices.



## Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.

- ALWAYS IN STOCK
- READY TO SHIP
- BREWED IN WISCONSIN
- EXPERT SUPPORT
- 5-YEAR WARRANTY
- PROTOCOL PARTNER

### BACNET MS/TP MANAGER FEATURES

Operation Mode	BACnet MS/TP Manager Initiator
Supported Object Types	Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value
Supported Service Codes	Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A
Maximum Connections	32
Number Read/Write Scan Lines per Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 128 Objects

### ASCII FEATURES

Operation Mode	Bidirectional ASCII Transmit and Receive
Maximum Number of Devices Supported	2
Concatenation	Concatenate up to 50 segments data in a delimited ASCII sting
Maximum Number of ASCII Characters Transferred	1024 in each direction
Delimiter Processing	Incoming delimiters can be automatically removed; Outgoing delimiters automatically added if configured
Parsing	Parse string of ASCII data in up to 50 segments by delimiter or offset

### INCLUDED WITH GATEWAY

3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

### ELECTRICAL/ENVIRONMENTAL


DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals

### ENCLOSURE/HARDWARE

Size	3.88" x 2.57" x 1.06"
Weight	5.5 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side

### GATEWAY FEATURES & FUNCTIONS

Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

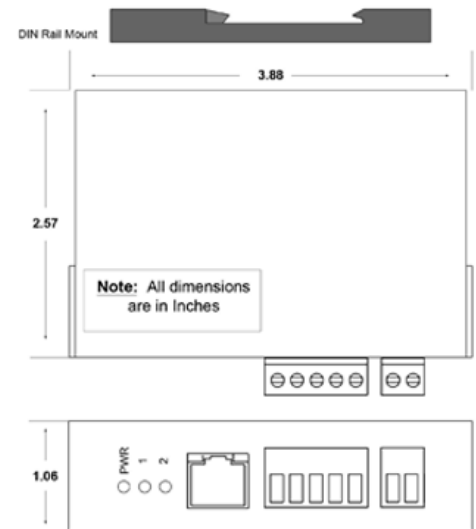

**NOT EXACTLY WHAT YOU WERE LOOKING FOR?**  
 RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit [www.rtautomation.com](http://www.rtautomation.com). We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460BMA-NNA4	BACnet MS/TP Subordinates to ASCII

