



REAL TIME AUTOMATION GATEWAY

460BMS-N34

INTERCONNECT YOUR BACNET MS/TP DEVICES

KEY FEATURES

- ▶ Fully configurable BACnet MS/TP Subordinate
- ▶ BACnet MS/TP supports device, binary I/O, analog I/O, and character string value object types
- ▶ Effortless browser-based configuration, no programming software is required
- ▶ Simple data translation allows you to manipulate data as it passes between protocols
- ▶ 5-year hardware warranty

Exchange Data on Your BACnet MS/TP Network

The 460BMS can exchange data between all your BACnet MS/TP devices using BACnet token passing.

Best of all, the product comes with 5-year warranty.

How Do I Use the 460BMS In My Application?

Use data manipulation to modify your data as you transfer it between devices. The manipulation fields allow up to three operations.

It really is that simple.



Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.

- ALWAYS IN STOCK
- READY TO SHIP
- BREWED IN WISCONSIN
- EXPERT SUPPORT
- 5-YEAR WARRANTY
- PROTOCOL PARTNER


BACNET MS/TP RESPONDER FEATURES	
Operation Mode	BACnet MS/TP Manager Responder
Supported Object Types	Device, Binary I/O, Analog I/O, Character String Value
Supported Service Codes	Read & Read Multiple-B, Write & Write Multiple-B, COV & COV unsolicited-B, Device Dynamic Binding-B, Dynamic Object Binding-B
Maximum Connections	1
Analog Objects Supported	1200 Input and 1200 Output
Binary Objects Supported	1600 Input and 1600 Output

INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL/ENVIRONMENTAL	
DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2

ENCLOSURE/HARDWARE	
Size	4.2" x 3.25" x 1"
Weight	7 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side

GATEWAY FEATURES & FUNCTIONS	
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

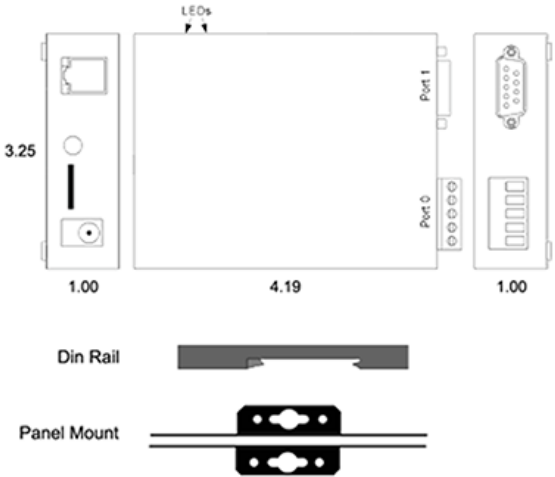

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460BMS-N34	Interconnect Your BACnet MS/TP Devices