REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com

REAL TIME AUTOMATION GATEWAY 460BMSSC-N2E

BACNET MS/TP TO SIEMENS S7 PLC

KEY FEATURES

- Fully configurable BACnet MS/TP Subordinate
- BACnet MS/TP supports device, binary I/O, analog I/O, and character string value object types
- Supports connections to five Siemens S7 PLCs
- Up to 150 read and 150 write requests per connection
- Effortless browser-based configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-year hardware warranty

Get Your BACnet MS/TP System Connected Directly to the Data Table of Your Siemens S7 PLC

The 460BMSSC connects a BACnet MS/TP system and up to five Siemens S7 PLCs.

Best of all, the product comes with 5-year warranty.

How Do I Use the 460BMSSC In My Application?

You allocate two memory blocks in your Siemens S7 PLC. One area is a user-defined set of Output addresses sending data to your BACnet MS/TP Manager. The other is Input only data receiving data from your BACnet MS/TP Manager.

It's really that simple. Need to modify your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to three mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

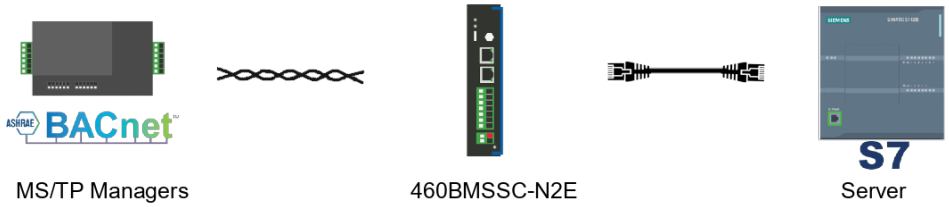

MS/TP Managers 460BMSSC-N2E Server

Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.

ALWAYS IN STOCK | READY TO SHIP | BREWED IN WISCONSIN | EXPERT SUPPORT | 5-YEAR WARRANTY | PROTOCOL PARTNER

REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com

BACNET MS/TP RESPONDER FEATURES	
Operation Mode	BACnet MS/TP Manager Responder
Supported Object Types	Device, Binary I/O, Analog I/O, Character String Value
Supported Service Codes	Read & Read Multiple-B, Write & Write Multiple-B, COV & COV unsolicited-B, Device Dynamic Binding-B, Dynamic Object Binding-B
Maximum Connections	1
Analog Objects Supported	1200 Input and 1200 Output
Binary Objects Supported	1600 Input and 1600 Output
S7 CLIENT FEATURES	
PLC Support	S7 300/400/1200/1500
Maximum Number of PLCs Supported	5
Maximum Number of Inputs/Outputs per PLC	150
Maximum Number of Bytes per Scan Line	400
Memory Area Access	Input (I), Output (Q), and Data Block(DB)
Supported Data Types	8 Bit Int, 16 Bit Int, 32 Bit Int, 32 Bit Float, Bool and Char Array

INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL/ENVIRONMENTAL	
DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2
ENCLOSURE/HARDWARE	
Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side
GATEWAY FEATURES & FUNCTIONS	
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

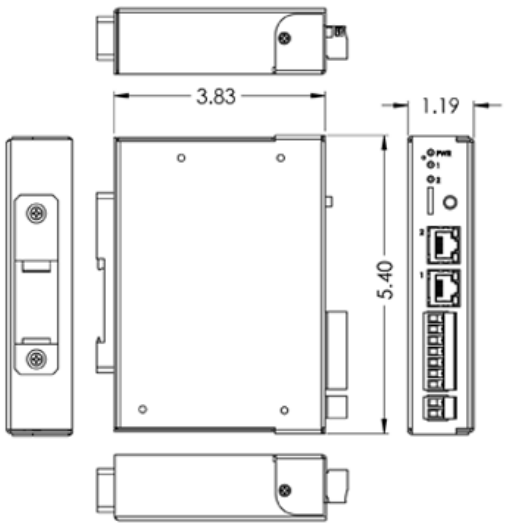

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460BMSSC-N2E	BACnet MS/TP to Siemens S7 PLC