

DeviceNet Slave Data to BACnet/IP

FEATURES:

- Fully Configurable DeviceNet Master
- Map Data from up to 32 DeviceNet Slaves
- Fully Configurable BACnet/IP Client
- BACnet/IP Supports Device, Binary I/O/V, Analog I/O/V, and Character String Value Object Types
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Get Your DeviceNet Slave Devices Connected Directly to Your BACnet/IP Server Devices

The 460DMBC moves data between a network of up to 32 DeviceNet Slaves and up to 32 BACnet/IP Server devices. With the 460DMBC you are making a direct connection between DeviceNet data and BACnet/IP Binary and Analog objects.

Bridge your factory automation systems with your building automation systems.

How do I use 460DMBC-N34 in my application?

Up to 400 bytes of DeviceNet data per Slave device will be mapped into your BACnet/IP Servers. DeviceNet Data will be mapped into your BACnet/IP Servers as Binary and Analog BACnet/IP objects.

It's really that simple. Need to modify your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to 3 mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

Try the RTA difference today.

Always in Stock - Five Year Warranty - Made in the USA - Industry Leading Support

A Gateway, A Philosophy, My Company

"I remember my days as a controls engineer. I remember the pressure to keep the line running and product flowing. The endless headaches and stress that came every time I had to install a new gateway. If I never saw another hundred-page manual or had to deal with fifty features I didn't need it would be too soon. I knew there had to be a better way. That's how Real Time Automation was formed. I found the best engineers and gave them one task. I asked them to make solutions so easy to use the hardest part would be opening the box. It has been twenty years now and we still strive for that same goal every day."

John Rinaldi



| DeviceNet Master FEATURES | |
|---------------------------------|---|
| Operation Mode | UCMM Client, Group 2 Client, Group 2 only Client |
| Explicit Message Support | Yes, only for allocation process |
| Implicit Message Support | Polled only, Assembly Object |
| Maximum DeviceNet Slave Devices | 32 |
| Data per Slave | 0-400 Bytes in each direction |
| Supported Data Types | BIT8, BIT16, BIT32, INT8, INT16, INT32, INT64, UINT8, UINT16, UINT32, UINT64, Float, Double |

| BACnet/IP Client FEATURES | |
|---|--|
| Operation Mode | BACnet/IP Client |
| Supported Object Types | Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value |
| Supported Service Codes | Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A |
| Maximum Connections | 32 |
| Number Read/Write Scan Lines per Device | 200 Total - 100 reads & 100 writes |
| Scan Line Support | Up to 128 Objects |


| INCLUDED WITH GATEWAY | |
|---|--|
| 3' power cable with flying leads | 5-year hardware warranty |
| IPSetup software – automatically locates RTA gateway on the network | Unlimited firmware feature upgrades for life |
| CAT5 crossover cable for direct connection to PC during programming | Complete, unlimited access to our industry leading support staff |
| Manual | |

| ELECTRICAL / ENVIRONMENTAL | |
|----------------------------|--|
| DC Input Voltage | 8 VDC @ 230mA to 28 VDC @ 80 mA |
| Maximum Baud Rate | 115K baud |
| Operating Temperature | -40 C to 85 C |
| Certification | RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2 |

| ENCLOSURE / HARDWARE | |
|----------------------|---|
| Size | 4.2" x 3.25" x 1" |
| Weight | 7 oz |
| Enclosure Type | Anodized Aluminum |
| Mounting | Din rail or panel mount |
| LEDs | Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side |

| GATEWAY FEATURES & FUNCTIONS | |
|------------------------------|---|
| Alarming | Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent. |
| Gateway Security | You can configure up to 9 different users access to diagnostic and configuration screens. |
| Translation Table | Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway. |
| Status and Counters | Protocol specific status, counters, and error messages are accessible within the gateways diagnostics page. They can also be delivered to a connected device. |
| Diagnostic Logging Page | Allows users to see and log start up sequences, protocol specific messages & error messages. |

DIMENSIONS

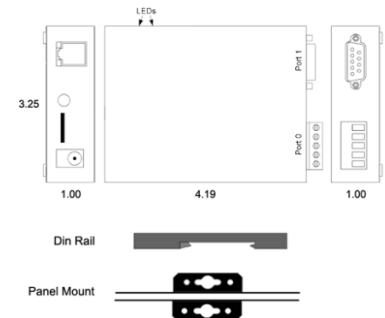

NOT EXACTLY WHAT YOU WERE LOOKING FOR?

Real Time Automation offers a full line of gateway products. If this is not the one you were looking for, give us a call at 1-800-249-1612. Or, check out a listing at www.rtaautomation.com/products. We also offer custom gateways to help customers dealing with unique needs or proprietary protocols.

| CATALOG # | DESCRIPTION |
|-------------|---|
| 460DMBC-N34 | Connects up to 32 DeviceNet Slaves with as many as 32 BACnet/IP Servers |

Allen-Bradley, ControlLogix, CompactLogix, PLC-5 are registered trademarks of Rockwell Automation, Inc.

