

CONTACT US! 1-800-249-1612 rtautomation.com

## 460ECBC-NNA1

### EtherNet/IP to BACnet/IP Server

## **FEATURES**

- Fully configurable EtherNet/IP scanner
- Map data from up to 32 EtherNet/IP adapters
- Fully configurable BACnet/IP client
- BACnet/IP supports device, binary I/O/V, analog I/O/V, multistate I/O/V, and character string value object types
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-Year Hardware Warranty

#### Connect EtherNet/IP Adapter Devices to BACnet/IP Servers

The 460ECBC moves data between a network of up to 32 BACnet/IP server devices and an EtherNet/IP network of up to 32 adapter devices. It's the perfect tool to tie all of your EtherNet/IP devices in with your BACnet/IP devices. Bridge your factory automation systems with your building automation systems.

#### How Do I Use the 460ECBC-NNA1 in My Application?


Up to 496 bytes of data from your EtherNet/IP adapters will be mapped to your BACnet/IP servers. When writing from your BACnet/IP servers to your EtherNet/IP adapters, BACnet/IP data will be mapped to up to 32 EtherNet/IP adapters as EtherNet/IP data.

It's really that simple. Need to modify your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to three mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

#### Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

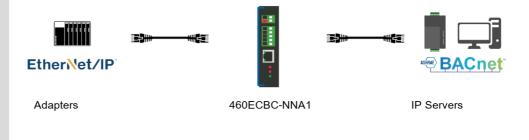

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

# **Specification**

ETHERNET/IP SCANNER FEATURES					
Operation Mode	Class 1 I/O Scanner				
Message Support	Implicit Class 1 Cyclic I/O, Explicit not supported				
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double				
Maximum EtherNet/IP Adapter Devices	32				
Max Data Per Adapter Connection	Up to 496 bytes in each direction				
Maximum IO Scan Rate	50 msec				
BACNET IP CLIENT FEATURES					
Operation Mode	BACnet/IP Client				
Supported Object Types	Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value				
Supported Service Codes	Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A				
Maximum Connections	32				
Number Read/Write Scan Lines per Device	200 Total - 100 reads & 100 writes				
Scan Line Support	Up to 128 Objects				
INCLUDED WITH GATEWAY					
3' power cable with flying leads	5-year hardware warranty				
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life				
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff				
Manual					

<b>ELECTRICAL / ENVIRONMENTA</b>	L	
DC Input Voltage	12-24 VDC	
Maximum Baud Rate	115K baud	DIN Rail Mount
Operating Temperature	-40 C to 85 C	· 3.88
Certification	RoHS-Compliant, UL, CUL, CE Approvals	,
ENCLOSURE / HARDWARE		
Size	3.88" x 2.57" x 1.06"	
Weight	5.5 oz	
Enclosure Type	Anodized Aluminum	2.57
Mounting	Din rail or panel mount	
LEDs	Power LED & 2 general purpose LEDs on side	Note: All dimensions
GATEWAY FEATURES & FUNCTIONS		are in Inches
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.	
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.	
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.	
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.	NOT EXACTLY WHAT YOU WERE LOOKING FOR? Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.	

ALWAYS IN STOCK	READY TO SHIP	ENGINERD SUPPORT	5-YEAR WARRANTY	<b>İÇÇİ</b> Î Employee own		
460ECBC-NNA1		Connects up to 32 EtherNet/IP adapters with as many as 32 BACnet/IP servers				
CATALOG #	DESCRIPTION					



solutions@rtautomation.com