

EtherNet/IP to BACnet MS/TP Slaves

FEATURES

- Fully Configurable EtherNet/IP Scanner
- Map Data from up to 32 EtherNet/IP Adapters
- Fully Configurable BACnet MS/TP Master
- BACnet MS/TP Supports Device, Binary I/O/V, Analog I/O/V, Multi-State I/O/V, and Character String Value Object Types
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Connect EtherNet/IP Adapter Devices to BACnet MS/TP Devices

The 460ECBM moves data between a network of up to 32 BACnet MS/TP slave devices and an EtherNet/IP network of up to 32 adapter devices. It's the perfect tool to tie all of your EtherNet/IP devices in with your BACnet/IP devices.

Bridge your factory automation systems with your building automation systems.

How do I use the 460ECBM-N700 in my application?

Up to 496 of data from your EtherNet/IP adapters will be mapped to your BACnet MS/TP slaves. When writing from your BACnet MS/TP slaves to your EtherNet/IP adapters, BACnet MS/TP data will be mapped to up to 32 EtherNet/IP adapters as EtherNet/IP data.

It's really that simple. Need to modify your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to three mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

Try the RTA difference today! Call us at 800-249-1612 or check out our solutions at rtautomation.com




A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience, all the better. Thirty years later, our mission remains the same: **to move your data where you need it, when you need it and how you need it.**

| EtherNet/IP Scanner FEATURES | |
|---|--|
| Operation Mode | Class 1 I/O Scanner |
| Message Support | 1 |
| Data Types | BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double |
| Maximum EtherNet/IP Adapter Devices | 32 |
| Max Data Per Adapter Connection | Up to 496 bytes in each direction |
| Maximum IO Scan Rate | 20 msec |
| BACnet MS/TP Master FEATURES | |
| Operation Mode | BACnet MS/TP Master Initiator |
| Supported Object Types | Device, BI/BO/BV, AI/AO/AV, MI/MO/MV, Character String Value |
| Supported Service Codes | Read Property-A, Read Property Multiple-A, Write Property-A, Write Property Multiple-A, Device Dynamic Binding-A |
| Maximum Connections | 32 |
| Number Read/Write Scan Lines per Device | 200 Total - 100 reads & 100 writes |
| Scan Line Support | Up to 128 Objects |
| INCLUDED WITH GATEWAY | |
| 3' power cable with flying leads | 5-year hardware warranty |
| IPSetup software – automatically locates RTA gateway on the network | Unlimited firmware feature upgrades for life |
| CAT5 crossover cable for direct connection to PC during programming | Complete, unlimited access to our industry leading support staff |
| Manual | |

| ELECTRICAL / ENVIRONMENTAL | |
|----------------------------|---------------------------------------|
| DC Input Voltage | 12-24 VDC |
| Maximum Baud Rate | 115K baud |
| Operating Temperature | -40 C to 85 C |
| Certification | RoHS-Compliant, UL, CUL, CE Approvals |

| ENCLOSURE / HARDWARE | |
|----------------------|---|
| Size | 4.19" x 3.25" x 1" |
| Weight | 6.5 oz |
| Enclosure Type | Anodized Aluminum |
| Mounting | Din rail or panel mount |
| LEDs | Power LED, Ethernet link/data LED, & Ethernet speed LED |

| GATEWAY FEATURES & FUNCTIONS | |
|------------------------------|--|
| Alarming | Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent. |
| Gateway Security | You can configure up to 9 different users access to diagnostic and configuration screens. |
| Translation Table | Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway. |
| Status and Counters | Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device. |
| Diagnostic Logging Page | Allows users to see and log start up sequences, protocol specific messages & error messages. |

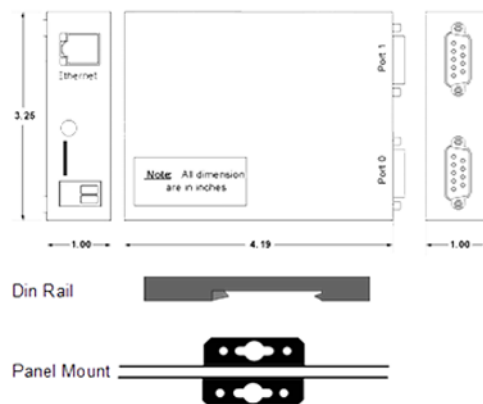

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

| CATALOG # | DESCRIPTION |
|--------------|---|
| 460ECBM-N700 | Connects up to 32 EtherNet/IP adapters with as many as 32 BACnet MS/TP slaves |



Made in the
U.S.A. 

Always In
Stock 

Ready to
Ship 

Expert
Support 