



REAL TIME AUTOMATION GATEWAY

460ESDHM-D2E

TURN YOUR SERIAL DH+ PLCS INTO AN ETHERNET/IP ADAPTER

KEY FEATURES

- ▶ Fully configurable EtherNet/IP adapter
- ▶ Up to 480 bytes in each direction per adapter connection
- ▶ Fully configurable DH+ device
- ▶ Connects up to as many as 32 DH+ devices
- ▶ Effortless browser-based configuration, no programming software is required
- ▶ Simple data translation allows you to manipulate data as it passes between protocols
- ▶ 5-year hardware warranty

Map Your Legacy PLC Data Tables into EtherNet/IP Adapter I/O


You can now make your legacy serial PLCs look like an EtherNet/IP adapter! Any of your old, serial PLCs like the PLC5 or SLC can now provide cyclic data to an EtherNet/IP scanner.

It's the perfect tool to keep those old legacy PLCs from the scrap pile and extend their useful life.

How Do I Use the 460ESDHM In My Application?

For most applications, the mapping is very straightforward. PLC data table values (like N7:200 and F9:1) are mapped directly into the input and output assemblies of the cyclic data transfer.

You don't have to implement any message instructions or ladder logic in the legacy DH+ PLCs.

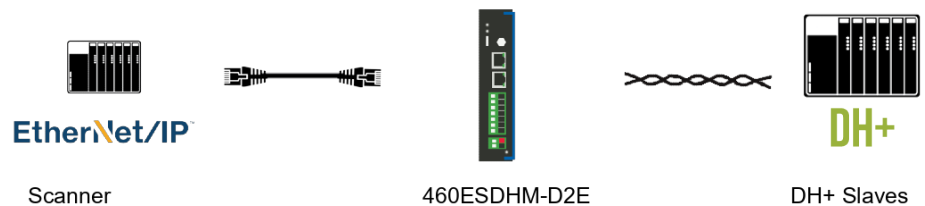

Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.

- ALWAYS IN STOCK
- READY TO SHIP
- BREWED IN WISCONSIN
- EXPERT SUPPORT
- 5-YEAR WARRANTY
- PROTOCOL PARTNER

ETHERNET/IP ADAPTER FEATURES

Operation Mode	Class 1 I/O Adapter
Message Support	Implicit Class 1 Cyclic I/O, Explicit Class 3 and UCMM Supported
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double
Maximum EtherNet/IP Scanner Devices	Up to 10 can listen, only 8 can write I/O
Maximum Data Supported	Up to 480 bytes in each direction per adapter connection
Maximum IO Scan Rate	20 msec

DH+ MASTER FEATURES

Operation Mode	DH+ Master
PLCs Supported	5/04, PLC5
Maximum number of Devices supported	32
Data Type Supported	100 Integers or 100 Binaries, or 50 floats, 82 character string per Scan line
Scan Lines	100 input / 100 output
Physical Connections	DH+

INCLUDED WITH GATEWAY

3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL/ENVIRONMENTAL


DC Input Voltage	12-24 VDC
Maximum Baud Rate	921.6K baud
Operating Temperature	-40 C to 85 C
Certification	CE Approvals

ENCLOSURE/HARDWARE

Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED, DH+ Status LED & general purpose LEDs on side

GATEWAY FEATURES & FUNCTIONS

Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

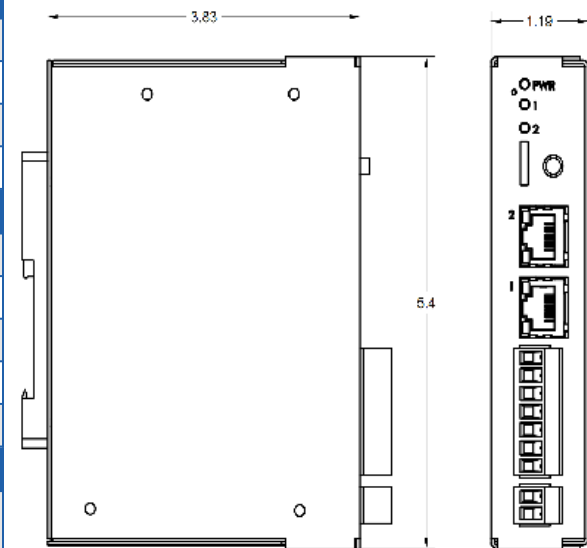

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460ESDHM-D2E	Turn Your Serial DH+ PLCs into an EtherNet/IP Adapter