

## EtherNet/IP to Low Level Allen-Bradley PLC

### FEATURES

- Fully Configurable EtherNet/IP Adapter
- Supports Up To 480 Bytes of Input and 480 Bytes of Output Data
- Supports connection to 5 Allen-Bradley PLCs
- Up to 150 Tag or File Arrays of data can be mapped in each direction
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

### Get Your EtherNet/IP Scanner Connected Directly to your Legacy Allen-Bradley PLC

The 460ESETC moves data between an EtherNet/IP Scanner device and up to 5 Allen-Bradley PLCs.

Move data from your EtherNet/IP Scanner device to low level legacy Allen-Bradley PLCs like the MicroLogix, SLC 505, and PLC 5E.



### How do I use 460ESETC-NNA4 in my application?

You allocate two areas of register blocks in your Allen-Bradley PLC. One area is a user defined set of write only registers accepting data from your EtherNet/IP device. The other is read only data to send to your EtherNet/IP devices.

It's really that simple.

### Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

Try the RTA difference today! Call us at 800-249-1612 or check out our solutions at [www.rtautomation.com](http://www.rtautomation.com).

**A Solution, A Philosophy, the RTA Way.** We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience, all the better. Thirty years later, our mission remains the same: **to move your data where you need it, when you need it and how you need it.**

### EtherNet/IP Adapter FEATURES

|                                     |  |
|-------------------------------------|--|
| Operation Mode                      | Class 1 I/O Adapter  |
| Message Support                     | Implicit Class 1 Cyclic I/O, Explicit Class 3 and UCMM Supported   |
| Data Types                          | BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double |
| Maximum EtherNet/IP Scanner Devices | Up to 10 can listen, only 1 can write I/O                          |
| Maximum Data Supported              | Up to 480 bytes in each direction                                  |
| Maximum IO Scan Rate                | 20 msec  |

### EtherNet/IP Tag Client FEATURES

|  |  |
|--|--|
| PLC Support                                    | ControlLogix, CompactLogix, FlexLogix, MicroLogix, SLC's and PLC5E's   |
| Maximum Number of PLCs Supported               | 5  |
| Maximum Number of Input Tags or Files per PLC  | 150  |
| Maximum Number of Output Tags or Files per PLC | 150  |
| Array Support                                  | Yes, for all data types except strings   |
| Supported Data Types                           | ControlLogix / CompactLogix / FlexLogix: Bit, 32 Bit Array, SINT, INT, REAL, STRING, DINT, MicroLogix / SLC / PLC5E: 16 Bit Array, INT, REAL, String |

### INCLUDED WITH GATEWAY

|   |  |
|---|--|
| 3' power cable with flying leads                                    | 5-year hardware warranty   |
| IPSetup software – automatically locates RTA gateway on the network | Unlimited firmware feature upgrades for life                     |
| CAT5 crossover cable for direct connection to PC during programming | Complete, unlimited access to our industry leading support staff |
| Manual  |  |

### ELECTRICAL / ENVIRONMENTAL

|                       |                                       |
|-----------------------|---------------------------------------|
| DC Input Voltage      | 12-24 VDC                             |
| Maximum Baud Rate     | 115K baud                             |
| Operating Temperature | -40 C to 85 C                         |
| Certification         | RoHS-Compliant, UL, CUL, CE Approvals |


### ENCLOSURE / HARDWARE

|                |  |
|----------------|--|
| Size           | 3.88" x 2.57" x 1.06"                      |
| Weight         | 5.5 oz                                     |
| Enclosure Type | Anodized Aluminum                          |
| Mounting       | Din rail or panel mount                    |
| LEDs           | Power LED & 2 general purpose LEDs on side |

### GATEWAY FEATURES & FUNCTIONS

|                         |   |
|-------------------------|---|
| Alarming                | Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.     |
| Gateway Security        | You can configure up to 9 different users access to diagnostic and configuration screens.   |
| Translation Table       | Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.                                     |
| Status and Counters     | Protocol specific status, counters, and error messages are accessible within the gateways diagnostics page. They can also be delivered to a connected device. |
| Diagnostic Logging Page | Allows users to see and log start up sequences, protocol specific messages & error messages.  |

### DIMENSIONS

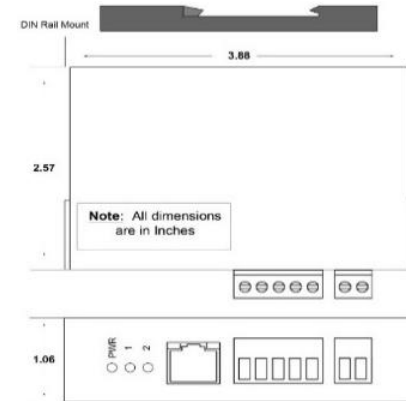

### NOT EXACTLY WHAT YOU WERE LOOKING FOR?

Real Time Automation offers a full line of gateway products. If this is not the one you were looking for, give us a call at 1-800-249-1612. Or, check out a listing at [www.rtautomation.com/products](http://www.rtautomation.com/products). We also offer custom gateways to help customers dealing with unique needs or proprietary protocols.

| CATALOG #     | DESCRIPTION  |
|---------------|--|
| 460ESETC-NNA4 | Connects an EtherNet/IP Scanner with as many as 5 Allen-Bradley PLCs |

Allen-Bradley, ControlLogix, CompactLogix, PLC-5 are registered trademarks of Rockwell Automation, Inc.

Made in the



Always In

stock



Ready to

Ship



Expert

Support

