REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com

REAL TIME AUTOMATION GATEWAY 460ESMC-NNA1

ETHERNET/IP TO MODBUS TCP/IP SERVER

KEY FEATURES

- Fully configurable EtherNet/IP adapter
- Up to 480 bytes in each direction per adapter connection
- Fully configurable Modbus TCP/IP Client
- Connects up to 32 Modbus TCP/IP servers
- Effortless browser-based configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-year hardware warranty

Connect Modbus TCP/IP Server Devices to an EtherNet/IP Scanner

The 460ESMC connects up to 32 Modbus TCP/IP devices to an EtherNet/IP PLC. It's a simple tool that allows you to use the plethora of available Modbus TCP/IP devices in your EtherNet/IP architectures.

Best of all, the product comes with 5-year warranty.

How Do I Use the 460ESMC In My Application?

For most applications, the mapping is very straightforward. Modbus register and coil data is mapped to EtherNet/IP IO blocks. Up to 480 bytes of data can be moved in each direction between EtherNet/IP and Modbus TCP/IP.

It really is that simple.

Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.

ALWAYS IN STOCK | READY TO SHIP | BREWED IN WISCONSIN | EXPERT SUPPORT | 5-YEAR WARRANTY | PROTOCOL PARTNER

REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com

ETHERNET/IP ADAPTER FEATURES	
Operation Mode	Class 1 I/O Adapter
Message Support	Implicit Class 1 Cyclic I/O, Explicit Class 3 and UCMM Supported
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double
Maximum EtherNet/IP Scanner Devices	Up to 10 can listen, only 8 can write I/O
Maximum Data Supported	Up to 480 bytes in each direction per adapter connection
Maximum IO Scan Rate	20 msec
MODBUS TCP CLIENT FEATURES	
Operation Mode	Modbus TCP/IP Client
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus TCP/IP Server Devices	32
Number Read/Write Scan Lines per Server Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 125 Registers or 512 Coils

INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL/ENVIRONMENTAL	
DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals
ENCLOSURE/HARDWARE	
Size	3.88" x 2.57" x 1.06"
Weight	5.5 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side
GATEWAY FEATURES & FUNCTIONS	
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

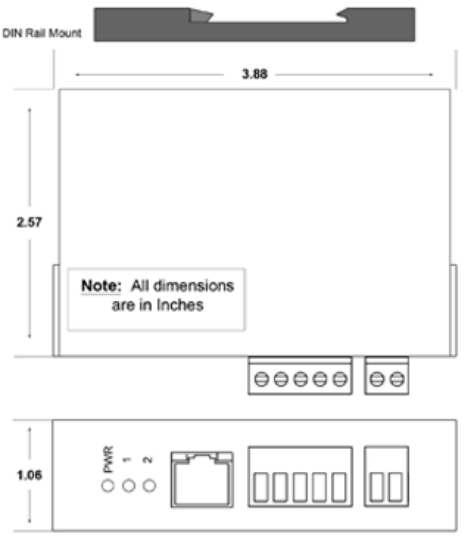

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460ESMC-NNA1	EtherNet/IP to Modbus TCP/IP Server