REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com

REAL TIME AUTOMATION GATEWAY 460ESQT-N2E

ETHERNET/IP SCANNER TO MQTT BROKER

KEY FEATURES

- Fully configurable EtherNet/IP adapter
- Up to 480 bytes in each direction per adapter connection
- Bring your factory data to the cloud
- Supports up to 3 MQTT broker connections
- Effortless browser-based configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-year hardware warranty

Connect an EtherNet/IP PLC to an MQTT Broker

The 460ESQT moves data between an EtherNet/IP scanner and an MQTT broker. Allowing you to easily log data and leverage in populating dashboards.

Best of all, the product comes with 5-year warranty.

How Do I Use the 460ESQT In My Application?

Map EtherNet/IP implicit IO data to topics in an MQTT broker.

SSL transport layer security protects the data moving from your operations network to the cloud.

Scanner 460ESQT-N2E Broker Devices

Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.

ALWAYS IN STOCK | READY TO SHIP | BREWED IN WISCONSIN | EXPERT SUPPORT | 5-YEAR WARRANTY | PROTOCOL PARTNER

REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com

ETHERNET/IP ADAPTER FEATURES	
Operation Mode	Class 1 I/O Adapter
Message Support	Implicit Class 1 Cyclic I/O, Explicit Class 3 and UCMM Supported
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double
Maximum EtherNet/IP Scanner Devices	Up to 10 can listen, only 8 can write I/O
Maximum Data Supported	Up to 480 bytes in each direction per adapter connection
Maximum IO Scan Rate	20 msec
MQTT CLIENT FEATURES	
Operation Mode	Generic MQTT, Amazon Web Services (AWS)
Max Broker Connections	Up to 3 Generic MQTT Connections or 1 AWS
Max Data Points Per Connection	250 Read Topics, 250 Write Topics
Security	SSL certificate based cloud access
Supported Data Formats	JSON
Data Payload	Topic Name and Value

INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL/ENVIRONMENTAL	
DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2
ENCLOSURE/HARDWARE	
Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side
GATEWAY FEATURES & FUNCTIONS	
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

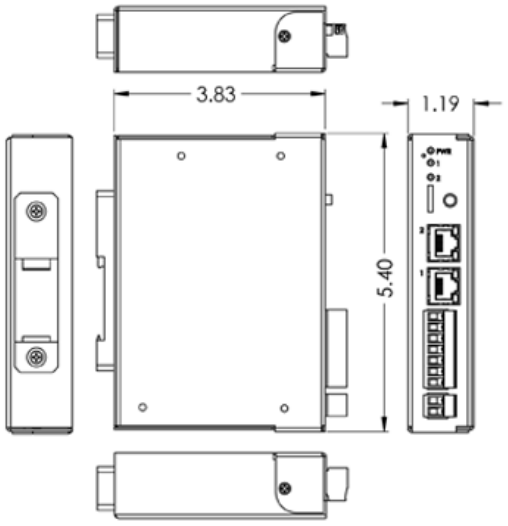

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460ESQT-N2E	EtherNet/IP Scanner to MQTT Broker