

Interconnect Up to Five Allen-Bradley PLCs

FEATURES

- Supports connection to five Allen-Bradley PLCs
- Up to 150 tag or file arrays of data can be mapped in each direction
- Effortless Browser Based Configuration, no programming software is required
- 5-Year Hardware Warranty

Connect Up to Five Allen-Bradley PLCs

The 460ETC can move data between up to five Allen-Bradley PLCs using connected and unconnected messaging.
Best of all, the product comes with 5-year warranty.

How Do I Use the 460ETC-N34 in My Application?

The 460ETC allows you to not only map, but also manipulate your data while moving it between PLCs.
It really is that simple..

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.




A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

ETHERNET TAG CLIENT FEATURES		
PLC Support	ControlLogix, CompactLogix, FlexLogix, MicroLogix, SLCs and PLC5Es	
Maximum Number of PLCs Supported	5	
Maximum Number of Input/Output Tags or Files per PLC	150	
Maximum Number of Bytes per PLC Tag	400	
Array Support	Yes, for all data types except strings	
Supported Data Types	Usint, Sint, Uint, Int, Uuint, Dint, Real, String, Bit Array 16, Bit Array 32, Bool, and Long	

ELECTRICAL / ENVIRONMENTAL	
DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2
ENCLOSURE / HARDWARE	
Size	4.2" x 3.25" x 1"
Weight	7 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side
INCLUDED WITH GATEWAY	
3' Power Cable with Flying leads	Manual
Complete, Unlimited Access to our Industry Leading Support Staff.	5 Year Hardware Warranty
IPSetup software – Automatically locates PTA Gateway on the	Unlimited Firmware Feature Upgrades for Life

The technical drawing illustrates the PTA Gateway enclosure from three perspectives: front, top, and side. The front view shows a rectangular unit with a height of 3.25 inches and a width of 1.00 inch. It features a DIN rail on the left side and two ports on the right, labeled 'Port 0' and 'Port 1'. The top view shows a length of 4.19 inches and a width of 1.00 inch. The side view shows the unit's profile with two LEDs indicated by arrows. Below the main views, two mounting options are shown: 'Din Rail' and 'Panel Mount'.

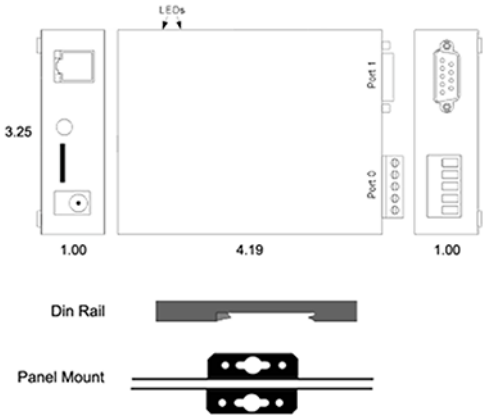

CATALOG #	DESCRIPTION	
460ETC-N34	Connect up to five Allen-Bradley PLCs	<div>NOT EXACTLY WHAT YOU WERE LOOKING FOR?</div> <div>Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.</div>
CAT5 Cross over cable for direct connection to PC during programming		



ALWAYS IN STOCK



READY TO SHIP



ENGINEERD SUPPORT



5-YEAR WARRANTY



EMPLOYEE OWNED