

## Modbus RTU to Modbus TCP/IP

### FEATURES

- Fully configurable Modbus TCP/IP client
- Connects up to 32 Modbus TCP/IP servers
- Fully configurable Modbus RTU Client
- Connects up to 32 Modbus RTU Servers
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-Year Hardware Warranty

### Get Your Modbus RTU Server Devices Connected to Modbus TCP/IP Server Devices

The 460MCMM moves data between up to 32 Modbus TCP/IP server devices and up to 32 Modbus RTU Server devices.

With the 460MCMM, register and coil data can be freely moved between your Modbus RTU and Modbus TCP/IP networks.

### How Do I Use the 460MCMM-N34 in My Application?

To your Modbus TCP/IP server devices, the gateway will look like any other Modbus TCP/IP client controller. To your Modbus RTU Servers, the gateway acts as a Modbus RTU Client. In the gateway, you configure what data will be exchanged. In the translation, you are able to map register and coil data from any device to any other device connected to the gateway.

### Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.




**A Solution, A Philosophy, the RTA Way.** We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

| MODBUS TCP CLIENT FEATURES  |  |
|---|--|
| Operation Mode  | Modbus TCP/IP Client   |
| Function Codes Supported  | 1,2,3,4,5,6, 15 & 16   |
| Swapping  | Byte and Word Swapping   |
| Maximum Modbus TCP/IP Server Devices                                | 32   |
| Number Read/Write Scan Lines per Server Device                      | 200 Total - 100 reads & 100 writes                               |
| Scan Line Support   | Up to 125 Registers or 512 Coils                                 |
| MODBUS RTU CLIENT FEATURES  |  |
| Operation Mode  | Modbus RTU Client  |
| Function Codes Supported  | 1,2,3,4,5,6, 15 & 16   |
| Swapping  | Byte and Word Swapping   |
| Maximum Modbus RTU Server Devices                                   | 32   |
| Number Read/Write Scan Lines per RTU Server Device                  | 200 Total - 100 reads & 100 writes                               |
| Scan Line Support   | Up to 125 Registers or 512 Coils                                 |
| INCLUDED WITH GATEWAY   |  |
| 3' power cable with flying leads                                    | 5-year hardware warranty   |
| IPSetup software - automatically locates RTA gateway on the network | Unlimited firmware feature upgrades for life                     |
| CAT5 crossover cable for direct connection to PC during programming | Complete, unlimited access to our industry leading support staff |
| Manual  |  |

| ELECTRICAL / ENVIRONMENTAL |  |
|----------------------------|--|
| DC Input Voltage           | 8 VDC @ 230mA to 28 VDC @ 80 mA                      |
| Maximum Baud Rate          | 115K baud  |
| Operating Temperature      | -40 C to 85 C  |
| Certification              | RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2 |

| ENCLOSURE / HARDWARE |   |
|----------------------|---|
| Size                 | 4.2" x 3.25" x 1"   |
| Weight               | 7 oz  |
| Enclosure Type       | Anodized Aluminum   |
| Mounting             | Din rail or panel mount   |
| LEDs                 | Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side |

| GATEWAY FEATURES & FUNCTIONS |  |
|------------------------------|--|
| Alarming                     | Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.      |
| Gateway Security             | You can configure up to 9 different users access to diagnostic and configuration screens.  |
| Translation Table            | Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.                                      |
| Status and Counters          | Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device. |
| Diagnostic Logging Page      | Allows users to see and log start up sequences, protocol specific messages & error messages.   |

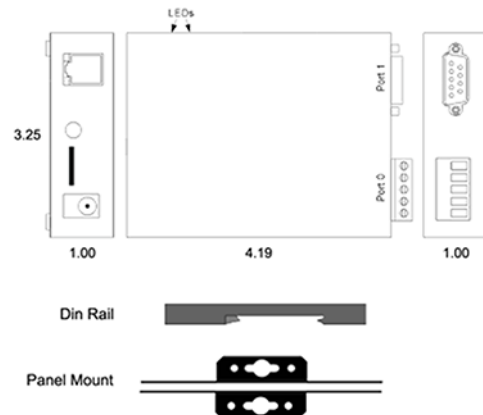

**NOT EXACTLY WHAT YOU WERE LOOKING FOR?**  
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at [www.rtautomation.com/products](http://www.rtautomation.com/products). We also offer customizations for unique applications.

| CATALOG #   | DESCRIPTION  |
|-------------|--|
| 460MCMM-N34 | Connects up to 32 Modbus TCP servers with as many as 32 Modbus RTU Servers |

