

CONTACT US! 1-800-249-1612 rtautomation.com

460MMBS-N34

Modbus RTU Servers to BACnet/IP

FEATURES

- Fully configurable Modbus RTU Client
- Connects up to 32 Modbus RTU Servers
- Fully configurable BACnet/IP server
- BACnet/IP supports device, binary I/O, analog I/O, and character string value object types
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-Year Hardware Warranty

Connect Modbus RTU Servers to BACnet/IP Client

The 460MMBS moves data between up to 32 Modbus RTU Servers and a BACnet/IP Building Automation System (BAS).

It's the perfect tool that allows you to use the plethora of Modbus RTU devices available in your BACnet/IP Building Automation Systems.


How Do I Use the 460MMBS-N34 in My Application?

Modbus register data is mapped to BACnet analog objects and Modbus coil data is mapped to Binary objects. The only additional piece required for BACnet is adding metadata which is nothing more than an ASCII description of each object. No other deep understanding of either protocol is required to configure the gateway. It really is that simple.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

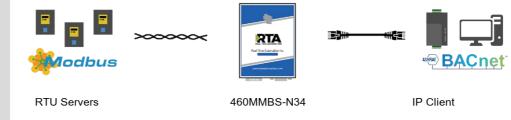

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

Specification

MODBUS RTU CLIENT FEATURES			
Operation Mode	Modbus RTU Client		
Function Codes Supported	1,2,3,4,5,6, 15 & 16		
Swapping	Byte and Word Swapping		
Maximum Modbus RTU Server Devices	32		
Number Read/Write Scan Lines per RTU Server Device	200 Total - 100 reads & 100 writes		
Scan Line Support	Up to 125 Registers or 512 Coils		
BACNET IP SERVER FEATURES			
Operation Mode	BACnet/IP Server		
Supported Object Types	Device, Binary I/O, Analog I/O, Character String Value		
Supported Service Codes	Read & Read Multiple-B, Write & Write Multiple-B, COV & COV unsolicited-B, Device Dynamic Binding-B, Dynamic Object Binding-B		
Maximum COV Subscriptions	2800		
Analog Objects Supported	1200 Input and 1200 Output		
Binary Objects Supported	1600 Input and 1600 Output		
INCLUDED WITH GATEWAY			
3' power cable with flying leads	5-year hardware warranty		
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life		
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff		
Manual			

DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA			
Maximum Baud Rate	115K baud			
Operating Temperature	-40 C to 85 C			
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2	5		Port 1
ENCLOSURE / HARDWARE		3.25		- ⁻
Size	4.2" x 3.25" x 1"	3.25		
Weight	7 oz			≥ 0000 0000 0000 0000
Enclosure Type	Anodized Aluminum			Porto 000000
Mounting	Din rail or panel mount			
LEDs	Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side	1.00	4.19	1.00
GATEWAY FEATURES & FUNCT	IONS	Din Rail		
	Set <, <=, >, >=, ==, !=, and change-of-state rules on			_
Alarming	any data moving through the gateway. If alarm rule			
	is triggered an email notification can be sent.	Panel Mount		
Gateway Security	You can configure up to 9 different users access to			
	diagnostic and configuration screens.			
	Allows for data manipulation during protocol			
Translation Table	translation. Scaling and other data format changes			
	can occur in the gateway.			
	Drotocol charific status countars and arror	NOT EXACTLY WI	HAT YOU WERE	LOOKING FOR?
Status and Counters	Protocol specific status, counters, and error	Real Time Automation	offers a full line	of gateway products.
	messages are accessible within the gateway's	Give us a call at 1-800	-249-1612. Or,	check out a listing at
	diagnostics page. They can also be delivered to a	www.rtautomatio	on.com/products	. We also offer
	connected device.	customizatio	ons for unique ap	plications.
Diagnostic Logging Page	Allows users to see and log start up sequences,			
Diagnostic Logonig Tage	protocol specific messages & error messages.			

CATALOG #	DESCRIPTION
460MMBS-N34	Connects up to 32 Modbus RTU Servers with a BACnet/IP client





WARRAINTY

5-YEAR WARRANTY

solutions@rtautomation.com



Real Time Automation, Inc.