

Web Interface to Modbus RTU Servers over Wi-Fi

FEATURES

- Fully configurable Modbus RTU Client
- Connects up to 32 Modbus RTU Servers
- Get PLC data table entries encoded in either JSON or XML
- Bidirectional data transfer supports both HTTP GET and POST
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-Year Hardware Warranty

Get Data from Modbus RTU Servers into Your Web Interface Device wirelessly

The 460MMWI moves data wirelessly between a web interface device and up to 32 Modbus RTU Servers. The gateway presents data from your Modbus RTU Server devices as JSON or XML files transferred via HTTP commands over Wi-Fi using Wi-Fi IEEE 802.11 b/g/n at 2.4GHz with AES encryption 128-bit.

With the 460MMWI, you are making a direct connection between XML/JSON data and registers or coils in your Modbus RTU Servers. With the 460MMWI, you have a tool to help you map Modbus RTU device data into an XML/JSON device. You can also send XML/JSON data and write them to your Modbus RTU Server devices.

How Do I Use the 460MMWI-N2EW in My Application?

Modbus RTU Server register and coil data will be mapped into XML/JSON data. Once that's complete, the data will be presented as XML or JSON files. Your application can issue standard HTTP GET or POST instructions to move data into your application.

It's really that simple.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.


When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.



RTU Servers



460MMWI-N2EW



Web Interface

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

MODBUS RTU CLIENT FEATURES

Operation Mode	Modbus RTU Client
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus RTU Server Devices	32
Number Read/Write Scan Lines per RTU Server Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 125 Registers or 512 Coils

WEB INTERFACE FEATURES

Max Web Interface Connections	One (gateway acting as client) / Unlimited (gateway acting as server)
Encodings	JSON and XML
Proxy Support	HTTP, SOCKS5 for Client
Maximum Number of Input Data Points	1000 JSON Fields or 1000 XML Tags
Maximum Number of Output Data Points	1000 JSON Fields or 1000 XML Tags
HTTP Services	Client: POST only; Server: GET and POST

INCLUDED WITH GATEWAY

3' power cable with flying leads	5-year hardware warranty
IPSetup software - automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

ELECTRICAL / ENVIRONMENTAL


DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2

ENCLOSURE / HARDWARE

Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side

GATEWAY FEATURES & FUNCTIONS

Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

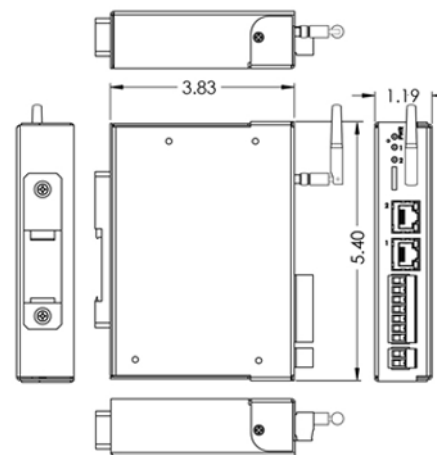

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460MMWI-N2EW	Connect up to 32 Modbus RTU Servers to a web interface device wirelessly

**ALWAYS IN STOCK****READY TO SHIP****ENGINEER SUPPORT****5-YEAR WARRANTY****EMPLOYEE OWNED**