

PROFIBUS Master to Ethernet TCP/IP

FEATURES:

- Fully Configurable Profibus Slave
- Supports 244 Bytes of data in each direction on Profibus DP
- Support up to 10 TCP/IP devices
- Parse & Concatenate ASCII data in up to 50 segments by delimiter or offset
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

Deliver Data from your PROFIBUS Master to an Ethernet TCP/IP Based System or Controller

The 460PBSTCP moves data between a PROFIBUS Master device and Ethernet TCP/IP.

Its a great tool to implement PROFIBUS devices into your PC or embedded applications that support Ethernet TCP/IP data.

How do I use 460PBSTCP-N70PB in my application?

Up to 244 bytes of data can be mapped to and from 10 Slots in your PROFIBUS Master device. The data segments can be converted to string and delivered your Ethernet TCP/IP devices. Incoming strings can be parsed and directed to user defined location.

Need to scale your data or manipulate it with other math functions? The 460PBSTCP allows you to add scaling to any data, apply simple math operations, add alarming and control the request speeds of your Master device.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

Try the RTA difference today.

Always in Stock - Five Year Warranty - Made in the USA - Industry Leading Support

A Gateway, A Philosophy, My Company

"I remember my days as a controls engineer. I remember the pressure to keep the line running and product flowing. The endless headaches and stress that came every time I had to install a new gateway. If I never saw another hundred-page manual or had to deal with fifty features I didn't need it would be too soon. I knew there had to be a better way. That's how Real Time Automation was formed. I found the best engineers and gave them one task. I asked them to make solutions so easy to use the hardest part would be opening the box. It has been twenty years now and we still strive for that same goal every day."

John Rinaldi



Profibus Device FEATURES

Maximum Number of Slots	10 Slots in, 10 Slots out
Slot Data Segment Sizes	2, 4, 8, 16, 24, 32 Bytes
Each Slot Can be Defined for a Single Data Type of	Int8, int16, int32, int64, UInt8, UInt16, UInt32, UInt64, float, double, binary8, binary16 or binary32, Short String
Total Data Supported	244 Bytes in each direction
Maximum Profibus DP Controller Connections	1
Baud Rates Supported	Autobaud (9600, 19.2K, 45.45K, 93.75K, 187.5K, 500K, 1.5M, 3M, 6M, 12M bits per second)

Ethernet TCP/IP FEATURES

Operation Mode	Client or Server
Maximum Number of Devices Supported	10
Maximum Number of Characters Transferred	1024
Delimiter Processing	Incoming delimiters can be automatically removed; Outgoing delimiters automatically added if configured
Parsing	Parse String of ASCII Data in up to 50 Segments by Delimiter or Offset
Concatenation	Concatenate up to 50 segments/strings of ASCII data with optional delimiter

INCLUDED WITH GATEWAY

3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

ELECTRICAL / ENVIRONMENTAL

DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals



ENCLOSURE / HARDWARE

Size	4.4" x 3.87" x 1.15"
Weight	8.5 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side

GATEWAY FEATURES & FUNCTIONS

Alarming	Set <, <=, >, >=, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateways diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

DIMENSIONS

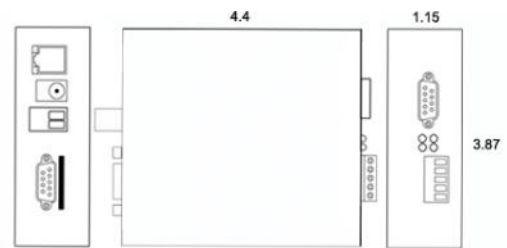

NOT EXACTLY WHAT YOU WERE LOOKING FOR?

Real Time Automation offers a full line of gateway products. If this is not the one you were looking for, give us a call at 1-800-249-1612. Or, check out a listing at www.rtaautomation.com/products. We also offer custom gateways to help customers dealing with unique needs or proprietary protocols.

CATALOG #	DESCRIPTION
460PBSTCP-N70PB	Connects a PROFIBUS DP Controller with as many as 10 Ethernet TCP/IP devices

Allen-Bradley, ControlLogix, CompactLogix, PLC-5 are registered trademarks of Rockwell Automation, Inc.

