



REAL TIME AUTOMATION GATEWAY

PROFINET IO CONTROLLER TO SNMP

460PSSM-N2E

KEY FEATURES

- ▶ Fully configurable PROFINET device
- ▶ Supports up to 1280 bytes of data in each direction on PROFINET IO
- ▶ Get data directly from SNMP enabled devices
- ▶ Support for SNMPv1 & SNMPv2c
- ▶ Effortless browser-based configuration, no programming software is required
- ▶ Simple data translation allows you to manipulate data as it passes between protocols
- ▶ 5-year hardware warranty

Connect your PROFINET IO Controller to SNMP enabled devices

The 460PSSM moves data between PROFINET IO Controllers and SNMP Agents. With support for SNMPv1 and SNMPv2c it has never been easier to bring data from all your SNMP enabled network devices to your factory floor. Best of all, the product comes with 5-year warranty.

How Do I Use the 460PSSM-N2E in My Application?

Data from your SNMP Agent device is written directly into the data table in your PROFINET IO Controller. Receive SNMP trap information with up to 10 variable bindings.

Use the RTA provided PC based tool to find and display all available Object Identifiers, then export to a file to be imported into the gateway and used for configuration.



Client



460PSSM-N2E



SNMP

SNMP Agents

Why Use RTA As Your Gateway Supplier?

Other companies might offer protocol gateways, but nobody matches the support and service you'll get from RTA. When you call, a real person picks up the phone. Sales gives you straight answers and solid recommendations. And when you need support, you'll talk to an engineer who helped build the product—no tickets, no waiting, just real help, right away.



PROFINET SERVER FEATURES

Maximum Number of Slots	10 Slots in, 10 Slots out
Slot Data Segment Sizes	8, 16, 32, 64 or 128 Bytes
Each Slot Can be Defined for a Single Data Type of	Int8, int16, int32, int64, UInt8, UInt16, UInt32, UInt64, float, double, binary8, binary16 or binary32, Short String
Total Data Supported in Each Direction	1280 Bytes
Maximum Profinet IO Controller Connections	1
String Support	1 string per slot

SNMP MANAGER FEATURES

Operation Mode	SNMPv1 Manager, SNMPv2c Manager
Maximum Agents Supported	32
Maximum Read/Write OIDs per Agent	100
Supported Set Data Types	Gauge32, Integer, Octet String
Supported Get Data Types	Counter32, Gauge32, Integer, Octet String, TimeTicks
SNMP Traps	Supported with up to 10 variable bindings with a 64 deep queue

INCLUDED WITH GATEWAY

3' power cable with flying leads	5-year hardware warranty
IPSetup software - automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL / ENVIRONMENTAL


DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2

ENCLOSURE / HARDWARE

Size	5.40" x 3.83" x 1.19"
Weight	7.6 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side

GATEWAY FEATURES & FUNCTIONS

Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

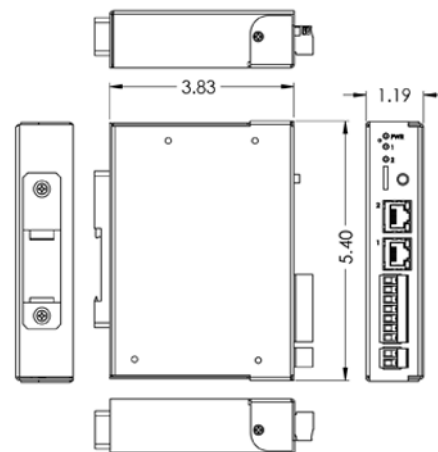

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG #
DESCRIPTION

460PSSM-N2E	Connect a PROFINET IO Controller to up to 32 SNMP Agents
-------------	--


ALWAYS IN STOCK

READY TO SHIP

ENGINEERD SUPPORT

5-YEAR WARRANTY

BREWED IN WISCONSIN

EMPLOYEE OWNED

Contact us:



800.249.1612



solutions@rtautomation.com



www.rtautomation.com