



REAL TIME AUTOMATION GATEWAY SIEMENS S7 PLCS TO SNMP

460SCSM-N2E

KEY FEATURES

- Supports connections to five Siemens S7 PLCs
- ▶ Up to 150 read and 150 write requests per connection
- ► Get data directly from SNMP enabled devices
- ► Support for SNMPv1 & SNMPv2c
- Effortless browser-based configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-year hardware warranty

Connect your Siemens S7 PLCs to SNMP

The 460SCSM moves data between Siemens S7 PLCs and SNMP Agents. With support for SNMPv1 and SNMPv2C it has never been easier to bring data from all your SNMP enabled network devices to your factory floor. Best of all, the product comes with 5-year warranty.

How Do I Use the 460SCSM-N2E in My Application?

Data from your SNMP Agent device is written directly into data locations in your Siemens S7 PLCs. Receive SNMP trap information with up to 10 variable bindings.

Use a PC based tool to find and display all available Object Identifiers, then export to a file to be imported into the gateway and used for configuration.



Why Use RTA As Your Gateway Supplier?


Other companies might offer protocol gateways, but nobody matches the support and service you'll get from RTA. When you call, a real person picks up the phone. Sales gives you straight answers and solid recommendations. And when you need support, you'll talk to an engineer who helped build the product—no tickets, no waiting, just real help, right away.




Siemens S7 CLIENT FEATURES		
PLC Support	S7 300/400/1200/1500	
Maximum Number of PLCs Supported	5	
Maximum Number of Inputs/Outputs per PLC	150	
Maximum Number of Bytes per Scan Line	400	
Memory Area Access	Input (I), Output (Q), and Data Block(DB)	
Supported Data Types	8 Bit Int, 16 Bit Int, 32 Bit Int, 32 Bit Float, Bool and Char Array	
SNMP MANAGER FEATURES		
Operation Mode	SNMP Manager	
SNMP Version Support	SNMPv1, SNMPv2c	
Maximum Agents Supported	32	
Maximum Read/Write OIDs per Agent	100	
Supported Get Data Types	Counter32, Gauge32, Integer, IP Address, Octet String, OID, TimeTicks	
Supported Set Data Types	Gauge32, Integer, Octet String	

INCLUDED WITH GATEWAY			
3' power cable with flying leads		5-year hardware warranty	
IPSetup software – automatically locates RTA gateway on the network		Unlimited firmware feature upgrades for life	
CAT5 crossover cable for direct connection to PC during programming		Complete, unlimited access to our industry leading support staff	
ELECTRICAL / ENVIRONMENTAL			
DC Input Voltage	12-24 VDC		

DC input voitage	12-24 VDC			
Maximum Baud Rate	115K baud			
Operating Temperature	-40 C to 85 C			
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class I Div 2			
ENCLOSURE / HARDWARE				
Size	5.40" x 3.83" x 1.19"			
Weight	7.6 oz			
Enclosure Type	Anodized Aluminum			
Mounting	Din rail or panel mount			
LEDs	Power LED & 2 general purpose LEDs on side			
GATEWAY FEATURES & FUNCTIONS				
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.			
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.			



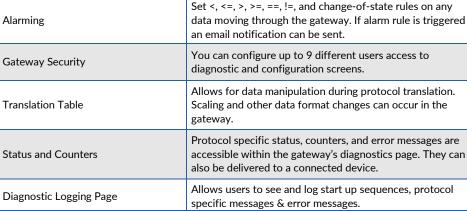

NOT EXACTLY WHAT YOU WERE LOOKING FOR?

RTA offers a full line of gateway products. Give us a call at 1-800-249-1612 or visit www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG# DESCRIPTION

460SCSM-N2E Connect up to five Siemens S7 PLCs to up to 32 SNMP Agents















