

Connect USB Scanners and Printers

FEATURES

- Full support for USB Barcode scanners & printers
- Provides up to 1 amp of power between USB ports
- Effortless Browser Based Configuration, no programming software is required
- 5-Year Hardware Warranty

Connect Up to Two Scanner or Printer Devices over USB

The 460USB moves data between up to two USB scanner or printer devices. Best of all, the product is made in the USA, always in stock, and comes with a five-year warranty.

How Do I Use the 460USB-NNBU in My Application?

Incoming USB data can be parsed and redirected to go out of the other USB port to another device. It really is that simple.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.



A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

USB FEATURES

Operation Mode	Class 3 (HID) and Class 7 (Printer)
Maximum Number of Devices Supported	2
ASCII Device Interfaces	USB
Maximum Number of ASCII Characters Transferred	128
Delimiter Processing	Incoming delimiters can be automatically removed; Outgoing delimiters automatically added if configured
Parsing	Parse string of ASCII data in up to 50 segments by delimiter or offset

ELECTRICAL / ENVIRONMENTAL


DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals

ENCLOSURE / HARDWARE

Size	3.88" x 2.57" x 1.06
Weight	5.5oz
Enclosure Type	Anodized Aluminum
Mounting	Din Rail or Panel Mount
LEDs	Ethernet Link/Data LED, Ethernet Speed LED, Power LED

INCLUDED WITH GATEWAY

3' Power Cable with Flying leads	Manual
Complete, Unlimited Access to our Industry Leading Support Staff.	5 Year Hardware Warranty
IPSetup software – Automatically locates RTA Gateway on the network	Unlimited Firmware Feature Upgrades for Life
CAT5 Cross over cable for direct connection to PC during programming	

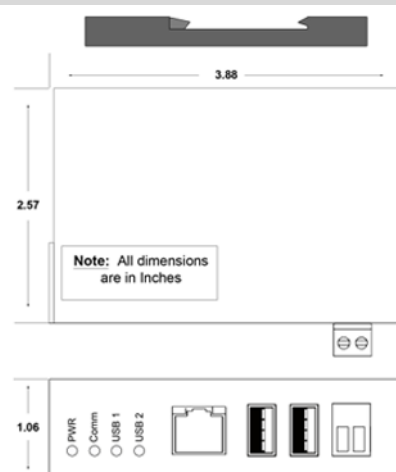

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at www.rtautomation.com/products. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460USB-NNBU	Exchange data from up to two USB scanner or printer devices



MADE IN THE
U.S.A.



ALWAYS IN
STOCK



READY TO
SHIP



EXPERT
SUPPORT

