REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com



REAL TIME AUTOMATION GATEWAY 460USBAWS-NNDU

USB TO/FROM AMAZON WEB SERVICES (AWS) GATEWAY

KEY FEATURES

- Full support for USB barcode scanners & printers
- Provides up to one amp of power across USB ports
- AWS Certified Product
- Allows factory-floor-based devices to move their data to IT
- Effortless browser-based configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-year hardware warranty


Connect Your USB Devices to/from the Cloud-Based AWS IoT Core Platform

The 460USBAWS moves data between up to two USB Human Interface Devices (Class 0x03) or printer devices (Class 0x07), and Amazon Web Services (AWS) IoT Core, mapping USB data directly to and from topics in the AWS platform. Connect your USB devices to AWS to easily log data and power real-time visibility across your operations without custom integration work.

How Do I Use the 460USBAWS In My Application?

USB data is mapped directly to and from topics in the AWS IoT Core.

SSL transport layer security protects all data moving from your operations network to AWS, ensuring your USB data is secure in transit.

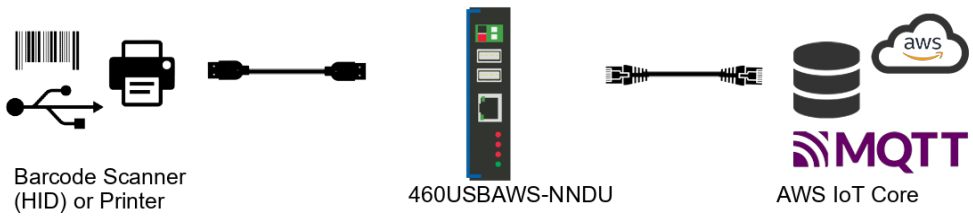

Why Use RTA As Your Gateway Supplier?

We are dedicated to being your trusted partner. When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support it comes from technical experts who know the product inside and out.


ALWAYS IN STOCK | READY TO SHIP | BREWED IN WISCONSIN | EXPERT SUPPORT | 5-YEAR WARRANTY | PROTOCOL PARTNER

REAL TIME AUTOMATION, INC.
N26W23315 Paul Road, Pewaukee, WI 53072
800.249.1612 | solutions@rtautomation.com

USB FEATURES	
Operation Mode	Human Interface Devices (HID) - Class 0x03, Printers - Class 0x07, FTDI Virtual Com
Maximum Number of Devices Supported	2
ASCII Device Interfaces	USB
Maximum Number of ASCII Characters Transferred	128
Delimiter Processing	Incoming delimiters can be automatically removed; Outgoing delimiters automatically added if configured
Parsing	Parse string of ASCII data in up to 50 segments by delimiter or offset
MQTT CLIENT FEATURES	
Operation Mode	Amazon Web Services (AWS)
Max Broker Connections	1 AWS
Max Data Points Per Connection	250 Read Topics, 250 Write Topics
Security	SSL certificate based cloud access
Supported Data Formats	JSON
Data Payload	Topic Name and Value

INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
Device discovery tool – automatically locates RTA the gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff

ELECTRICAL/ENVIRONMENTAL	
DC Input Voltage	8 VDC @ 230 mA to 28 VDC @ 80 mA
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	CE Approvals
ENCLOSURE/HARDWARE	
Size	3.88" x 2.57" x 1.06"
Weight	5.5 oz
Enclosure Type	Anodized Aluminum
Mounting	DIN rail or panel mount
LEDs	Power LED, Ethernet link/data LED, Ethernet speed LED, 2 USB LEDs and 1 general purpose LED on side
GATEWAY FEATURES & FUNCTIONS	
Gateway Security	You can configure up to nine different users access to diagnostic and configuration screens.
Status and Counters	Protocol specific status, counters and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages and error messages.

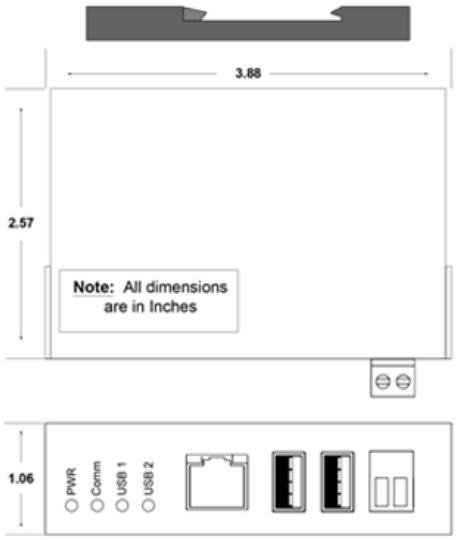

NOT EXACTLY WHAT YOU WERE LOOKING FOR?
RTA offers a full line of gateway products. Give us a call at 800.249.1612 or visit www.rtautomation.com. We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460USBAWS-NNDU	USB to/from Amazon Web Services (AWS) Gateway