

## Ethernet to Allen-Bradley PLC

### FEATURES

- Support for All Allen-Bradley PLCs
- Supports up to 4096 characters
- No Scan lists or IO trees to deal with
- Transfer Data Independently to and from Either Serial Port
- Separate Read and Write Tags/Registers for Each Serial Port
- Simple, Browser-Based Configuration
- Support for Connected and Unconnected Messaging
- Ability to Save Configurations for Backup or Loading Multiple Units
- Works with a NetENI module on legacy PLC applications
- Amazing Diagnostics and trouble shooting tools

### The Easiest Way to Integrate Ethernet Data into an Allen-Bradley PLC

The 490NBX can move your data to and from your ASCII Ethernet TCP or UDP devices with only one PLC tag. This means you can have one 490NBX to bridge the gap between your Allen-Bradley PLC and up to 10 ASCII devices with a minimal amount of setup for both the 490NBX and your PLC.


### How Do I Use the 490NBX-N700 in My Application?

The 490NBX will reach out and initiate the communication to your PLC. This means you will not need to setup anything in your PLC's IO tree and can access your tags directly. You only need three items to establish a connection to your Allen-Bradley PLC; the IP address, your PLC type, and a PLC tag name.

### Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

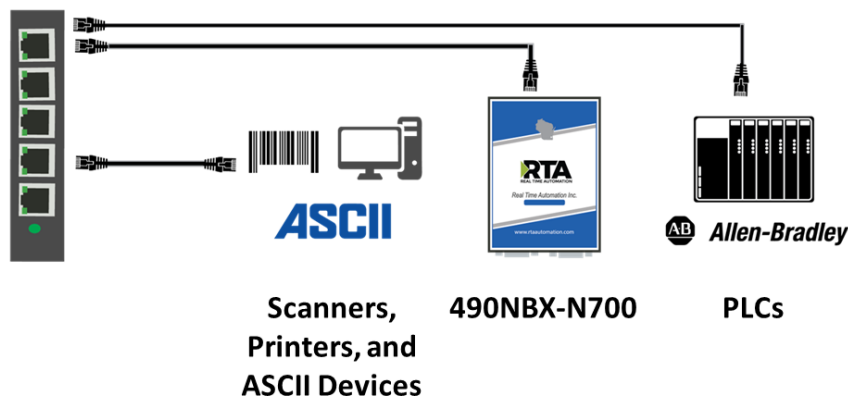

**A Solution, A Philosophy, the RTA Way.** We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: **To move your data where you need it, when you need it, and how you need it.**

<b>ASCII</b>	
Maximum Number of ASCII devices	10
Wide Characters	Add Padding on Outgoing
Communications	Ethernet TCP/IP UDP/IP
Message Queue Size	Configurable, 0-20 messages
<b>EtherNet/IP Tag Client</b>	
PLC Support	ControlLogix, CompactLogix, FlexLogix, MicroLogix, SLCs and PLC5Es
Maximum Number of PLCs Supported	1
Messaging Operation	Connected or Unconnected
Net ENI Support	Supported
<b>CONFIGURABLE PARAMETERS</b>	
Max Buffer Transmit Length	-For Compactlogix,Controllogix, and Flexlogix, the range for each data type is String/INT/SINT: 0 to 4096 characters.-For Micrologix , PLC5E, and SLC, the range for each data type is String: 0 to 82 characters, INT: 0-200 characters, SINT: not used
Receive Characters Timeout	This timeout value is the time between the last character received by the 435NBX and the time the next characters is received. The Timeout value : 0 to 30000 ms (0 to disable)
Tag Names	-For Compactlogix,Controllogix, and Flexlogix, any name will suffice.-For Micrologix , PLC5E, and SLC : STRING (ST10:0) or INT (N7:0) for instance.
Delimiters for Start/ End	Start/End Count 0-2 (0=disable) being used. 1 Delimiter and 2 Delimiter messages detected when specific starting and ending characters are detected.

<b>ELECTRICAL / ENVIRONMENTAL</b>	
DC Input Voltage	12 -24 VDC
Maximum Baud Rate	115K Baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals
<b>ENCLOSURE / HARDWARE</b>	
Size	4.2" x 3.25" x 1"
Weight	5 oz.
Enclosure Type	Anodized Aluminum
Mounting	Din Rail or Panel Mount
LEDs	Ethernet Link/Data LED, Ethernet Speed LED, Power LED
<b>INCLUDED WITH GATEWAY</b>	
3' Power Cable with Flying leads	Manual
Complete, Unlimited Access to our Industry Leading Support Staff.	5 Year Hardware Warranty
IPSetup software – Automatically locates RTA Gateway on the network	Unlimited Firmware Feature Upgrades for Life
CAT5 Cross over cable for direct connection to PC during programming	

**NOT EXACTLY WHAT YOU WERE LOOKING FOR?**  
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at [www.rtautomation.com/products](http://www.rtautomation.com/products). We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
490NBX-N700	TCP/IP and UDP/IP to Allen-Bradley PLC Gateway



Made in the  
**U.S.A.**

Always In  
**Stock**

Ready to  
**Ship**

Expert  
**Support**