

## EtherNet/IP to OPC UA

### FEATURES

- Fully Configurable EtherNet/IP Scanner
- Map Data from up to 32 EtherNet/IP Adapters
- Fully configurable OPC UA Server
- Up to 10 Read and Write Groups with up to 200 Nodes per Group
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- Guaranteed Stock
- 5-Year Hardware Warranty

### Connect EtherNet/IP Adapter Devices Directly to OPC UA

The 460ECUS moves data between EtherNet/IP adapters to OPC UA

Best of all, the product is made in the USA, always in stock, and comes with 5-year warranty.

### How do I use the 460ECUS-NNA4 in my application?

Bytes of data in your Ethernet/IP adapters are mapped to OPC nodes. The data moves bidirectionally.

It really is that simple.

### Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.


**Try the RTA difference today! Call us at 800-249-1612 or check out our solutions at [rtautomation.com](http://rtautomation.com)**



**A Solution, A Philosophy, the RTA Way.** We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience, all the better. Thirty years later, our mission remains the same: **to move your data where you need it, when you need it and how you need it.**

EtherNet/IP Scanner FEATURES	
Operation Mode	Class 1 I/O Scanner
Message Support	1
Data Types	BIT8,16 & 32; INT8, 16, 32 & 64; UINT8,16, 32 & 64; Float & Double
Maximum EtherNet/IP Adapter Devices	32
Max Data Per Adapter Connection	Up to 496 bytes in each direction
Maximum IO Scan Rate	20 msec
OPC UA Client FEATURES	
OPC UA Server	Operation Mode
opc.tcp/binary with no Security	Simultaneous Connections Supported
3	Max number of Input Nodes per Node Type
200	Max number of Output Nodes per Node Type
200	Array Support
Boolean,64 Bit Integer, 64 Bit Unsigned Int and 64 bit Float	Profiles Supported
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

ELECTRICAL / ENVIRONMENTAL	
DC Input Voltage	12-24 VDC
Maximum Baud Rate	115K baud
Operating Temperature	-40 C to 85 C
Certification	RoHS-Compliant, UL, CUL, CE Approvals
ENCLOSURE / HARDWARE	
Size	3.88" x 2.57" x 1.06"
Weight	5.5 oz
Enclosure Type	Anodized Aluminum
Mounting	Din rail or panel mount
LEDs	Power LED & 2 general purpose LEDs on side
GATEWAY FEATURES & FUNCTIONS	
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.

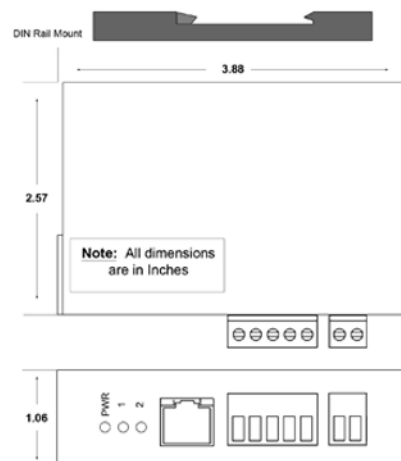

**NOT EXACTLY WHAT YOU WERE LOOKING FOR?**  
 Real Time Automation offers a full line of gateway products. Give us a call at 1-800-249-1612. Or, check out a listing at [www.rtautomation.com/products](http://www.rtautomation.com/products). We also offer customizations for unique applications.

CATALOG #	DESCRIPTION
460ECUS-NNA4	Connects up to 32 EtherNet/IP adapters to OPC UA

