

CONTACT US! 1-800-249-1612 rtautomation.com

460MSMM-N34

Modbus RTU to Modbus TCP/IP

FEATURES

- Fully configurable Modbus TCP/IP server
- Move up to 100 groups of 512 contiguous coils or 512 contiguous registers to or from your Modbus TCP/IP client
- Fully configurable Modbus RTU Client
- Connects up to 32 Modbus RTU Servers
- Effortless Browser Based Configuration, no programming software is required
- Simple data translation allows you to manipulate data as it passes between protocols
- 5-Year Hardware Warranty

Get Your Modbus RTU Server Devices Connected to Your Modbus TCP/IP Client

The 460MSMM moves data between up to 32 Modbus RTU Server devices and a Modbus TCP/IP client devices.

Best of all, the product comes with 5-year warranty.

How Do I Use the 460MSMM-N34 in My Application?


Connect Modbus RTU Servers to Modbus TCP/IP controller. In the gateway, you configure what data it will read and write from the Modbus TCP/IP client and each Server device connection.

It's really that simple. Need to modify your data as it passes from one protocol to the other? No problem. Each data mapping you apply can be modified with up to three mathematic functions. Add 4 to a value, multiply by 4 and divide by 10 with ease.

Why Use Real Time Automation as a Gateway Supplier?

While there are certainly other companies offering protocol gateways, there is no one who provides the level of support and service that you receive from RTA.

When you call, a live person answers the phone. When you talk with sales, you will get honest answers and recommendations. When you get support, it is from an engineer who had a hand in the product's development, and support doesn't require a ticket or 24-hour wait.

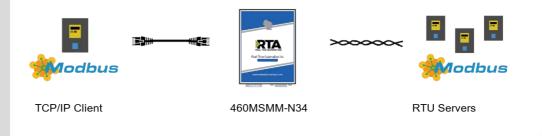

A Solution, A Philosophy, the RTA Way. We understand the long hours spent on a factory floor and the pressure to keep a line running and product flowing. That's how Real Time Automation came to be. You want easy-to-use solutions where the hardest part is to open the box. You need customer support second to none. If you get all that and a fun customer experience all the better. Thirty years later, our mission remains the same: To move your data where you need it, when you need it, and how you need it.

Specification

MODBUS TCP SERVER FEATURES	
Operation Mode	Modbus TCP/IP Server
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus TCP/IP Client Connections	10
Contiguous Data Areas	200 Total - 100 reads & 100 writes
Data Area Limits	512 Contiguous Coils or 512 Contiguous Registers
MODBUS RTU CLIENT FEATURES	
Operation Mode	Modbus RTU Client
Function Codes Supported	1,2,3,4,5,6, 15 & 16
Swapping	Byte and Word Swapping
Maximum Modbus RTU Server Devices	32
Number Read/Write Scan Lines per RTU Server Device	200 Total - 100 reads & 100 writes
Scan Line Support	Up to 125 Registers or 512 Coils
INCLUDED WITH GATEWAY	
3' power cable with flying leads	5-year hardware warranty
IPSetup software – automatically locates RTA gateway on the network	Unlimited firmware feature upgrades for life
CAT5 crossover cable for direct connection to PC during programming	Complete, unlimited access to our industry leading support staff
Manual	

DC Input Voltage	8 VDC @ 230mA to 28 VDC @ 80 mA			
Maximum Baud Rate	115K baud		EOs	
Operating Temperature	-40 C to 85 C		۹	
Certification	RoHS-Compliant, UL, CUL, CE Approvals, Class			Port 1
ENCLOSURE / HARDWARE				
Size	4.2" x 3.25" x 1"	3.25		
Weight	7 oz			
Enclosure Type	Anodized Aluminum			Port 0
Mounting	Din rail or panel mount			
LEDs	Ethernet link/data LED, Ethernet speed LED, power LED, & 2 general purpose LEDs on side	1.00	4.19	1.00
GATEWAY FEATURES & FUNC	TIONS	Din Rail		
Alarming	Set <, <=, >, >=, ==, !=, and change-of-state rules on any data moving through the gateway. If alarm rule is triggered an email notification can be sent.	Panel Mount		-
Gateway Security	You can configure up to 9 different users access to diagnostic and configuration screens.		UC 20	
Translation Table	Allows for data manipulation during protocol translation. Scaling and other data format changes can occur in the gateway.			
Status and Counters	Protocol specific status, counters, and error messages are accessible within the gateway's diagnostics page. They can also be delivered to a connected device.		offers a full line o	f gateway products heck out a listing at We also offer
Diagnostic Logging Page	Allows users to see and log start up sequences, protocol specific messages & error messages.			

C.	ATALOG #	DESCRIPTION
40	60MSMM-N34	Connects a Modbus TCP client with as many as 32 Modbus RTU Servers







5-YEAR WARRANTY



Real Time Automation, Inc.

solutions@rtautomation.com